

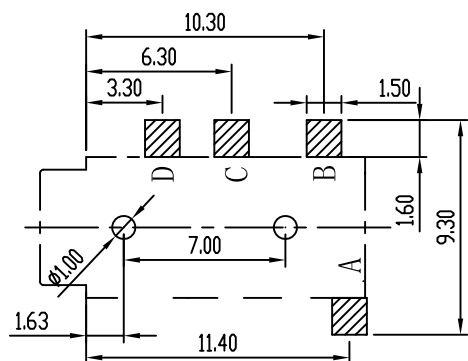
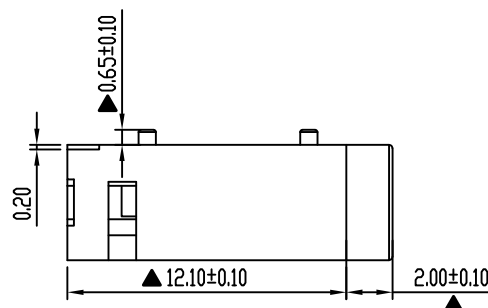
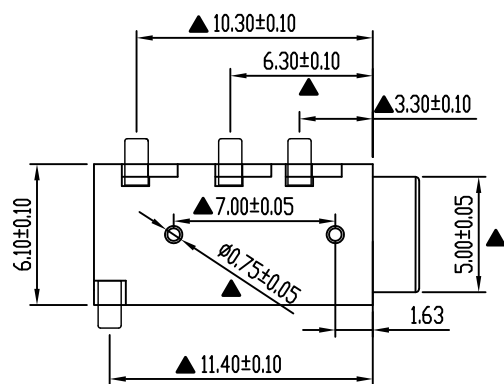




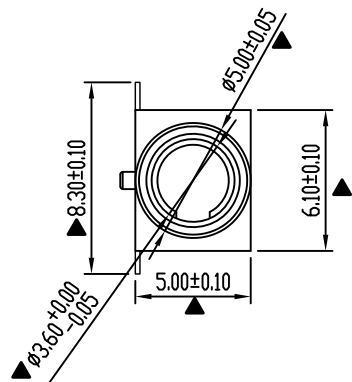

P. C. B LAYOUT

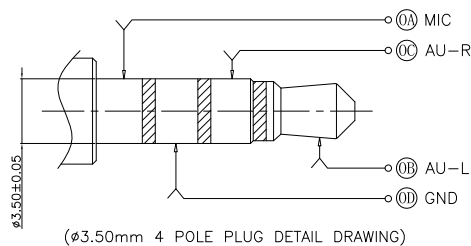

Model No	HJ-320D
Schematic	

备注:

1. 材质:
端子: C5191-EH.T=0.20mm.
胶芯: PA9T.UL 94-V0.
2. 功能处允许毛边0.03mm max,
非功能处允许毛边0.05mm max.
3. 表面无模痕、压伤、刮伤、破损、变形等现象.
4. 盐雾测试:24H (其它按客户要求).
5. 环保要求: 符合"ROHS"标准
6. 图示标有"▲"符号者为重点量测尺寸.
7. 图示标有"⊗"符号者为FAI量测尺寸.
8. CONTACT CURRENT RATING: 30V DC.0.5A.
9. CONTACT RESISTANCE:30 mΩ Max.
10. INSULATION RESISTANCE: 100 MΩ Min.250V DC/1min.
11. DIELECTRIC WITHSTANDING: 500V AC Min.
12. DURABILITY: 5000 CYCLES Min.
13. CONNECTOR INSERTION FORCES: 0.30kgf~3kgf.
14. CONNECTOR EXTRACTION FORCES: 0.30kgf~3kgf.
15. OPERATING TEMPERATURE RANGE: -20 TO +80℃.

1	接触片	C5191
2	耳机座	PA9T

X (颜色)

黑/black (B)

蓝/blue (BL)

黄/yellow (Y)

绿/green (G)

粉/pink (PI)



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PJ-320D	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC03-PJ320D-500-X	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2609081015	SHEET NO. 1 OF 1