

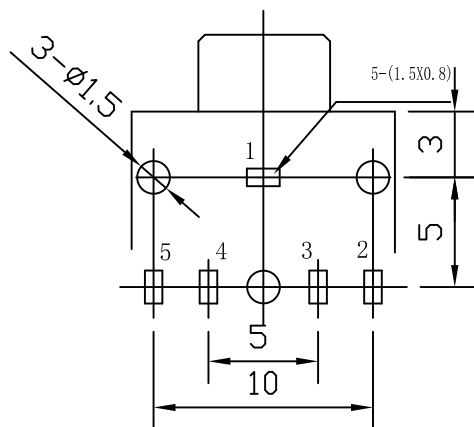
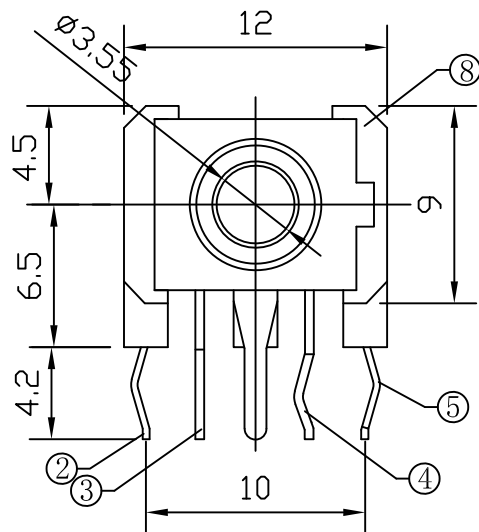


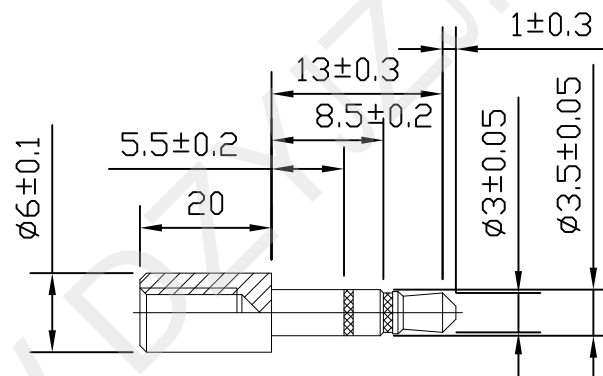

P.C.B. LAYOUT
TOP VIEW

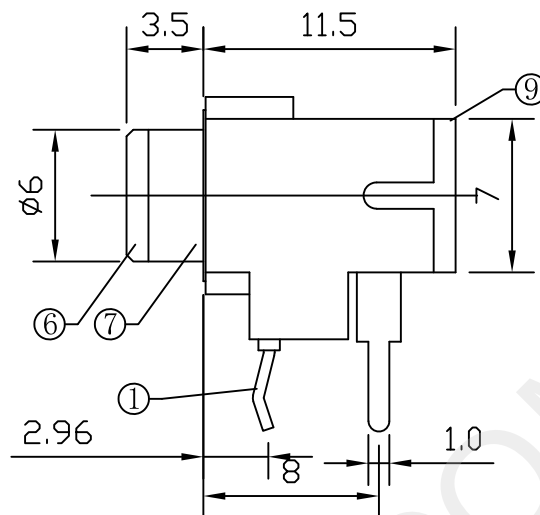

主要技术性能	
额定电负荷	DC 30V/0.5A
接触电阻	≤0.03 Ω
绝缘电阻	≥100MΩ
耐压	AC500V(50Hz)/min
插拔力	3-20N
使用温度范围	-30~70℃
使用寿命	5000次

PJ-306	PJ-306-1	PJ-306-2	PJ-306-3

SCHEMATIC

9	PJ-306-01	1#	1	黄铜	0.40Y	镀银
8	PJ-306-02	2#	1	磷铜	0.30T	镀银
7	PJ-306-03	3#	1	黄铜	0.40T	镀银
6	PJ-306-04	4#	1	黄铜	0.40T	镀银
5	PJ-306-05	5#	1	磷铜	0.30Y	镀银
4	PJ-306-06	内铜套	1	黄铜		镀银
3	PJ-306-07	色圈	1	PBT		黑/红OR绿
2	PJ-306-08	基座	1	PBT\PA66		黑/红OR绿
1	PJ-306-09	盖	1	PBT\PA66		黑/红OR绿
序号	产品编号	产品名称	数量	材料	规格	处理



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY :	DATE :	PART NAME:	
	陈一鸣	2014-02-23	PJ-306-5P 带铜套 垫高	
	CHECKED BY:	DATE :	PART NO.	HYC02-PJ306-150
	马跃	2014-02-23	MOLD NO.	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY:	DATE :	DRAW NO:	HYC-2609071013
	邱敏	2014-02-23	SHEET NO.	1 OF 1