

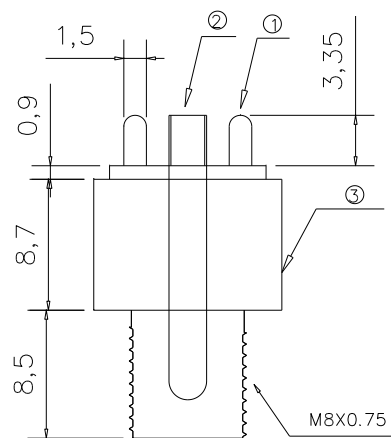
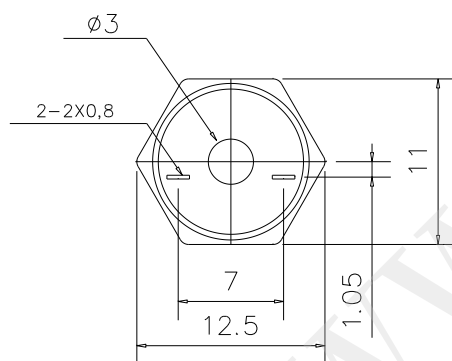





电路原理图

=====

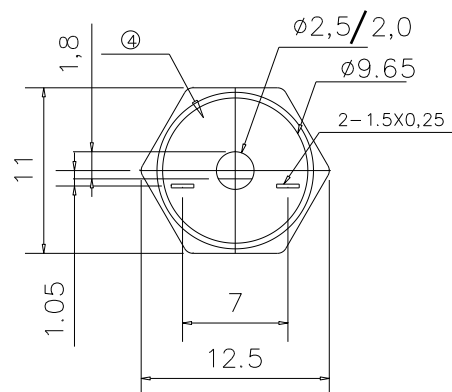

线路板安装尺寸示意图

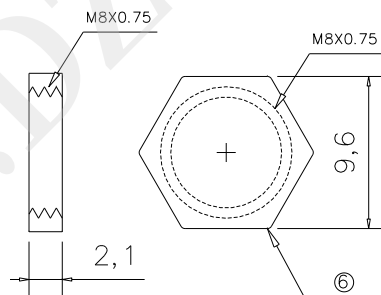

主要技术性能

1. 额定电负荷: 30V 10A;
2. 接 触 电 阻: $\leq 0.03 \Omega$;
3. 绝 缘 电 阻: $\geq 100M\Omega$;
4. 耐 压: AC500V (50Hz)/min;
5. 插 拔 力: 3~20N;
6. 寿 命: 5,000次。

6	螺 帽	1	H59 黄铜棒	镀镍
5	轴 套	1	H59 黄铜棒	镀镍
4	插 针	1	H59 黄铜棒	镀银
3	垫 片	1	铁	镀镍
2	插针脚	1	磷铜带 T=0.4	镀银
1	基 座	1	PBT	黑色
序号	名 称	数量	材 料	备 注



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC 座	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC099H-XXX	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2608171142	SHEET NO. 1 OF 1