
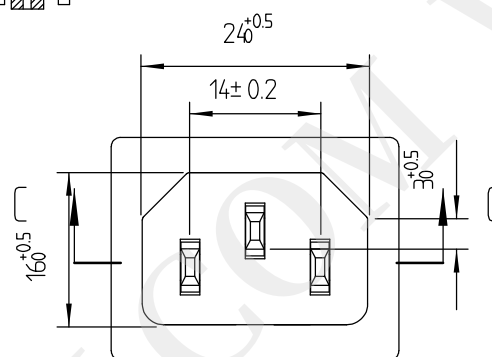

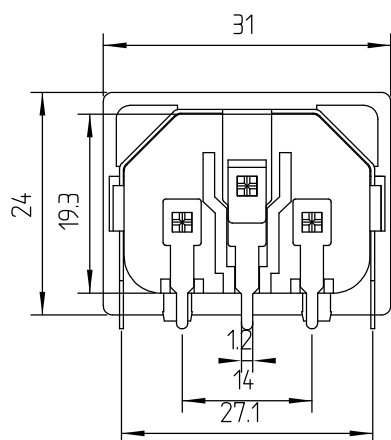
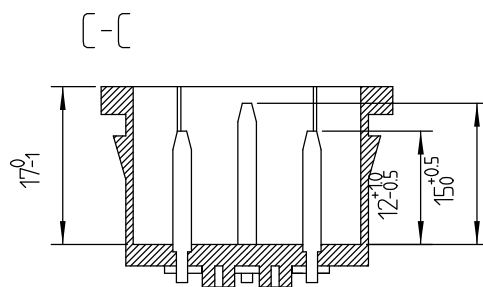


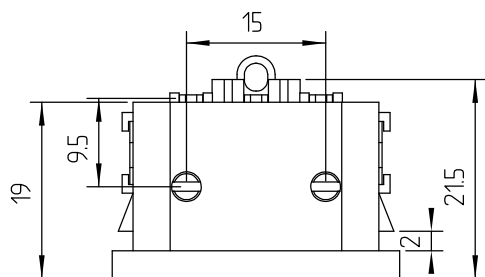

主要技术特性要求:



1. 产品用途: 各类电源插座

2. 额定电流: 10A

3. 额定电压: 250V

4. 绝缘电阻: 100MΩ 500V DC/1 Min


5. 耐压: 2500VAC(50-60Hz) 5S

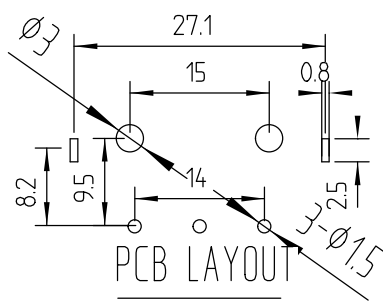

5	中脚	1	黄铜带H62 Y=0.8mm	电镀铜锡			
4	左右片	2	黄铜带H62 Y=0.8mm	电镀铜锡			
3	长插脚	1	黄铜带H62 Y=2mm	电镀铜锡			
2	短插脚	2	黄铜带H62 Y=2mm	电镀铜锡			
1	DB-14-12基座	1	PA66				
序号	名称	数量	材料	处理	单件质量	总计质量	备注



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: AC 插座	
		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DB-14-12	
		APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2609211606	
UNIT: mm [inch] SCALE:1:1 SIZE: A4		SHEET NO. 1 OF 1			