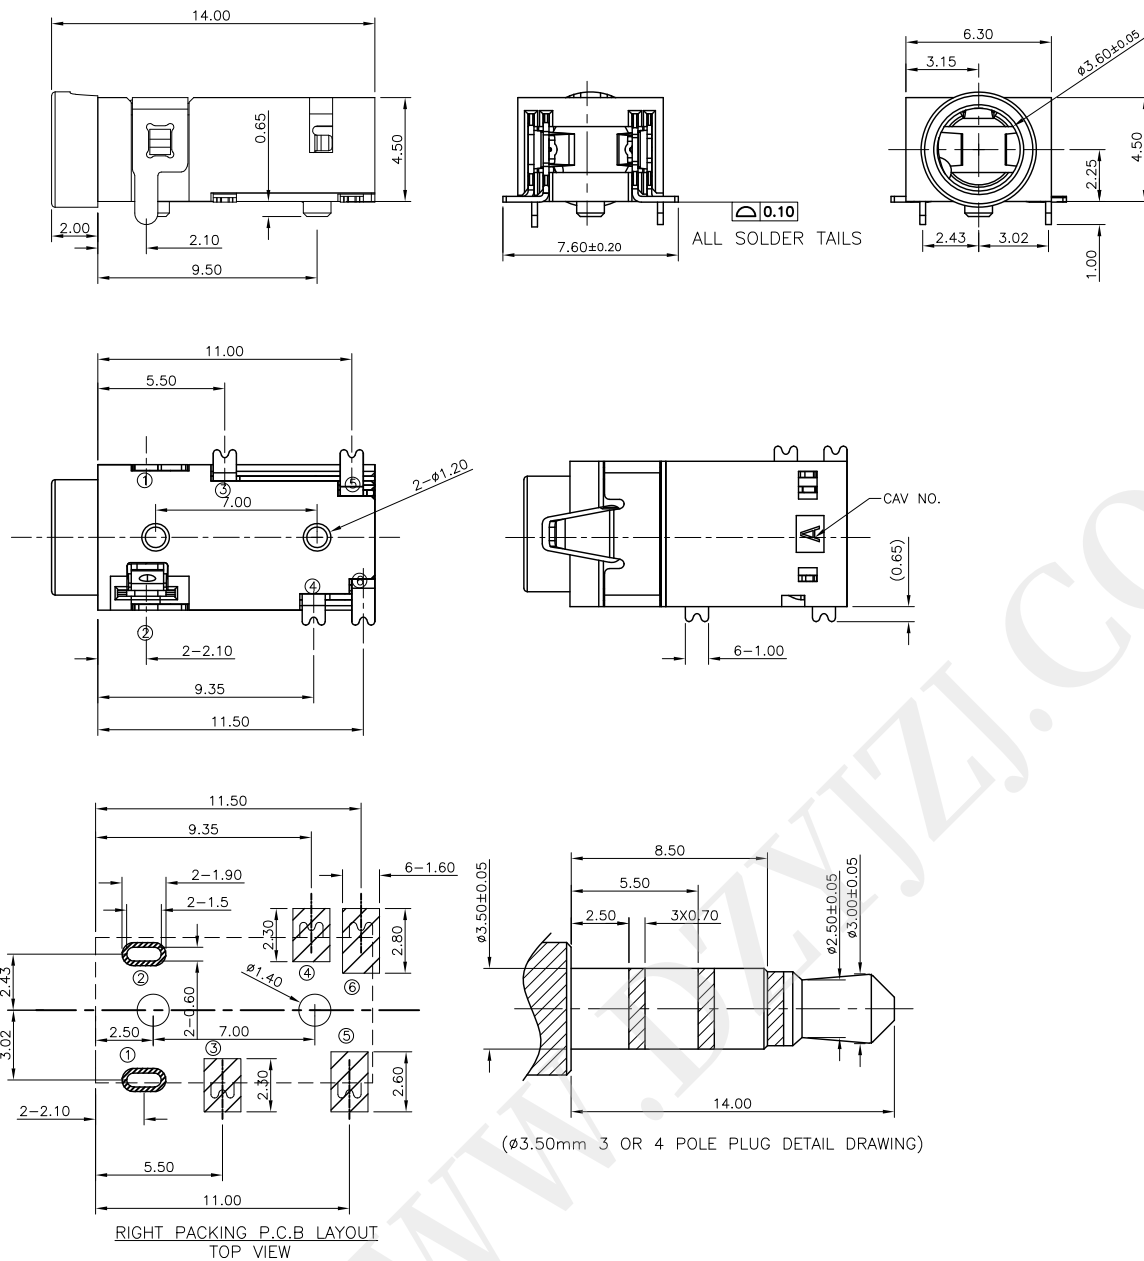


推荐选5#,6#端为检测PIN

SCHEMATIC

NOTES:

1. CONTACT CURRENT RATING:1A;
2. CONTACT RESISTANCE:50mA MAX;
3. INSULATION RESISTANCE:100M Ω MIN;
4. DIELECTRIC WITHSTANDING:500V AC MIN;
5. DURABILITY:5000CYCLES MIN;
6. CONNECTOR MATING FORCES:(0.3~3.0kgf);
7. CONNECTOR UNMATING FORCES:(0.3~3.0kgf);

06	CONTACT F	1 PCS	PHOSPHOR BRONZE, T=0.25	Au Plated
05	CONTACT E	1 PCS	PHOSPHOR BRONZE, T=0.25	Au Plated
04	CONTACT D	1 PCS	PHOSPHOR BRONZE, T=0.25	Au Plated
03	CONTACT C	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
02	CONTACT B	1 PCS	PHOSPHOR BRONZE, T=0.25	Au Plated
01	CONTACT A	1 PCS	PHOSPHOR BRONZE, T=0.25	Au Plated
07	HOUSING	1 PCS	HIGH TEMPERATURE PLASTIC	BLACK
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." $\pm 2'$ X.X" $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PJ-342 有头双柱 前两插后四贴	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-PJ342BJ-140	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO: HYC-2609221123	
			SHEET NO. 1 OF 1	