



① G/M  
③ R  
⑤ L  
⑥ SWITCH  
④ DETECT  
② M/G

NOTE:

- 1.ELECTRICAL CHARACTERISTICS:
  - 1.1 RATINGS:DC 30V 0.5A
  - 1.2 CONTACT RESISTANCE:100mΩ MAX
  - 1.3 INSULATION RESISTANCE:100MΩ MIN
  - 1.4 WITHSTAND VOLTAGE:AC 500V /1 Minute
  - 1.5 WORKING TEMPERATURE:-25~+ 85°C
  - 1.6 SOLDER HEAT RESISTANCE:245±5°C
- 2.MECHANICAL CHARACTERISTICS:
  - 2.1 OPERATIONG FORCE:3~30N
  - 2.2 SERVICE LIFE:5,000 Cycle.

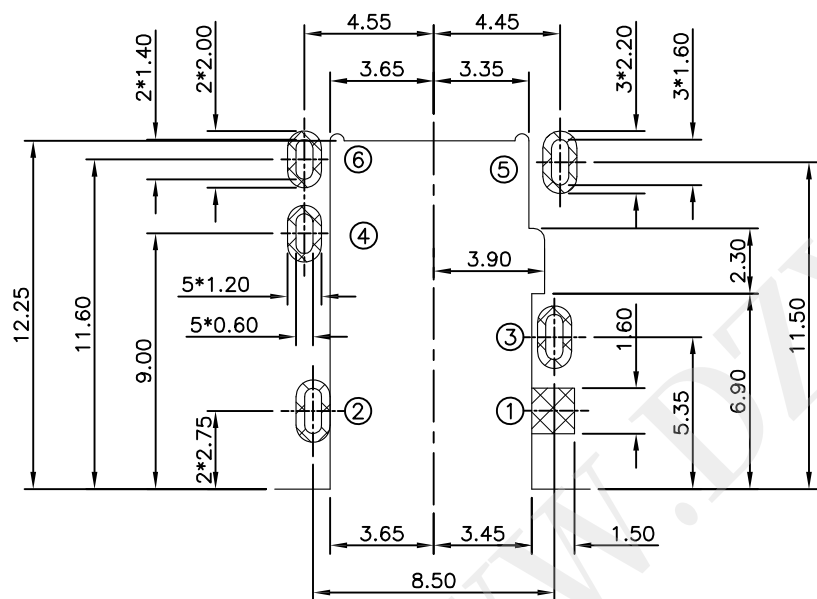

RIGHT PACKING P.C.B LAYOUT  
TOP VIEW

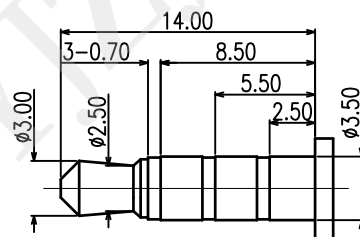

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)



深圳市华宇创精密电子有限公司

|                                                                                       |            |                   |                      |                     |                |
|---------------------------------------------------------------------------------------|------------|-------------------|----------------------|---------------------|----------------|
| TOLERANCE:                                                                            |            | DRAWN BY :<br>陈一鸣 | DATE :<br>2014-02-23 | PART NAME:          |                |
| X.X ±0.30                                                                             | X.XX ±0.25 |                   |                      | PJ-342 无头沉板 五插一贴反功能 |                |
| X.XXX ±0.15                                                                           |            | CHECKED BY:<br>马跃 | DATE :<br>2014-02-23 | PART NO.            | HYC-PJ342G-100 |
| X: ±2°                                                                                | X.X° ±0.5° |                   |                      | MOLD NO.            |                |
|  |            | APPROVED BY:      | DATE :               | DRAW NO:            | HYC-2609221041 |
| UNIT: mm [inch]                                                                       |            |                   |                      | SHEET NO.           | 1 OF 1         |
| SCALE:1:1                                                                             | SIZE: A4   | 邱敏                | 2014-02-23           |                     |                |