


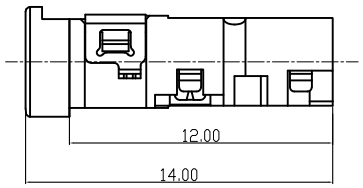











SCHEMATIC

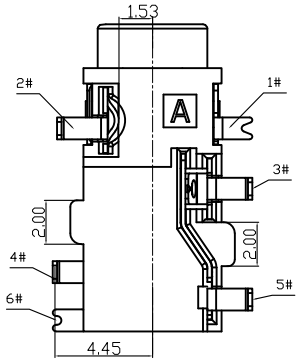


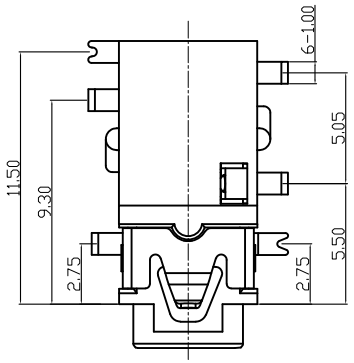


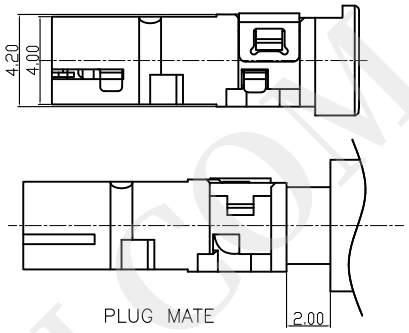


NOTE:

1.ELECTRICAL CHARACTERISTICS:

1.1 RATINGS:DC 30V 0.5A

1.2 CONTACTRESISTANCE:100mΩ MAX

1.3 INSULATION RESISTANCE:100MΩ MIN

1.4 WITHSTAND VOLTAGE:AC 500V /1 Minute

1.5 WORKING TEMPERATURE:−25~+

1.6 SOLDER HEAT RESISTANCE:245±5°C

2.MECHANICAL CHARACTERISTICS:

2.1 OPERATIONG FORCE:3~30N

2.2 SERVICE LIFE:5,000 Cycle.

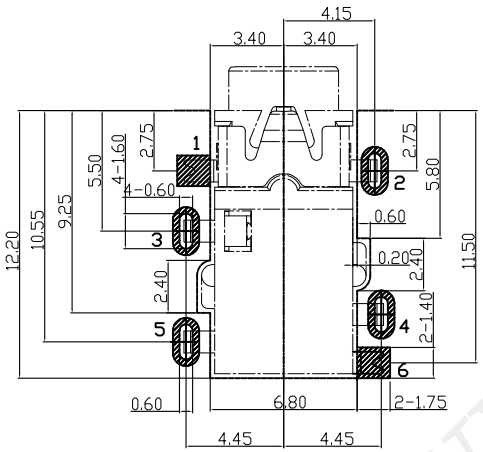


RECOMMEND PCB LAYOUT
TOLERANCE ±0.05

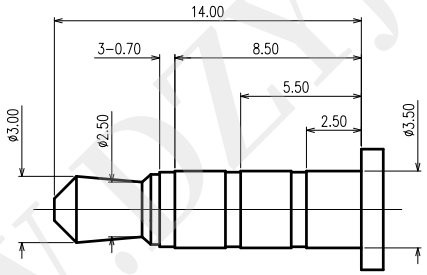


(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

深圳市华宇创精密电子有限公司

| | | | |
|---|---|---|---|
| TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5° | DRAWED BY : 陈一鸣 | DATE : 2014-02-23 | PART NAME: PJ-342有头沉板（四插两贴） |
| | CHECKED BY: 马跃 | DATE : 2014-02-23 | PART NO. HYC-PJ342SD-135 |
| UNIT: mm [inch] | APPROVED BY: 邱敏 | DATE : 2014-02-23 | MOLD NO. / DRAW NO: HYC-2609220945 |
| SCALE:1:1 SIZE: A4 | | | SHEET NO. 1 OF 1 |

WWW.DZYJZJ.COM