
3D VIEW



推荐选5#;7#端为检测PIN

SCHEMATIC


NOTES:

1. CONTACT CURRENT RATING:1A;
2. CONTACT RESISTANCE:50mΩ MAX;
3. INSULATION RESISTANCE:100MΩ MIN;
4. DIELECTRIC WITHSTANDING:500V AC MIN;
5. DURABILITY:5000CYCLES MIN;
6. CONNECTOR MATING FORCES:2.94~29.4N(0.3~3.0kgf);
7. CONNECTOR UNMATING FORCES:2.94~29.4N(0.3~3.0kgf);

07	CONTACT F	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
06	CONTACT E	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
05	CONTACT D	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
04	CONTACT C	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
03	CONTACT B	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
02	CONTACT A	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
01	HOUSING	1 PCS	HIGH TEMPERATURE PLASTIC	BLACK,
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION

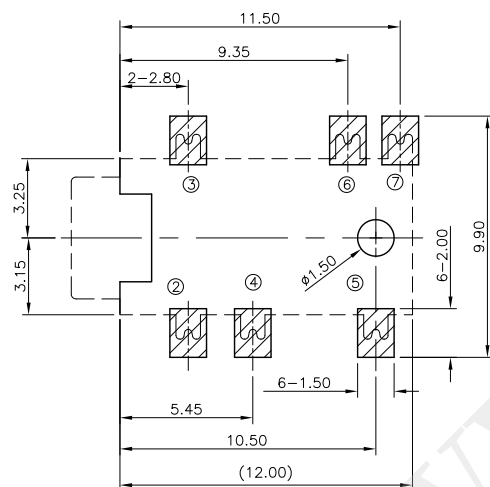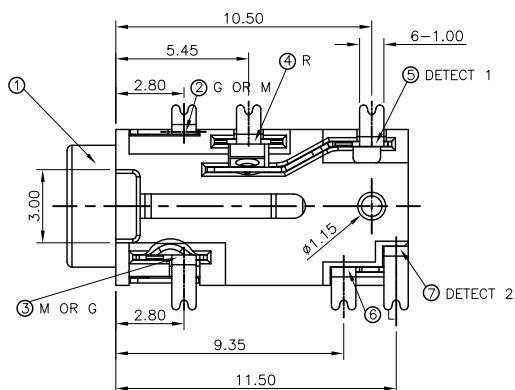

RIGHT PACKING P.C.B LAYOUT
TOP VIEW

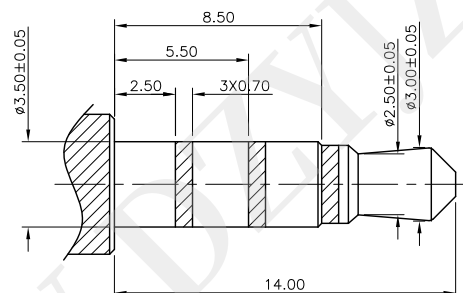

(ø3.50mm 3 OR 4 POLE PLUG DETAIL DRAWING)



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PJ-342 有头单柱 全贴	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15					
X.' ±2' X.X' ±0.5'		CHECKED BY:	DATE :	PART NO.	HYC02-PJ342-400
		马跃	2014-02-23	MOLD NO.	
	UNIT: mm [inch]	APPROVED BY:	DATE :	DRAW NO:	HYC-2609221130
SCALE:1:1 SIZE: A4		邱敏	2014-02-23	SHEET NO.	1 OF 1