





3D VIEW



SCHEMATIC

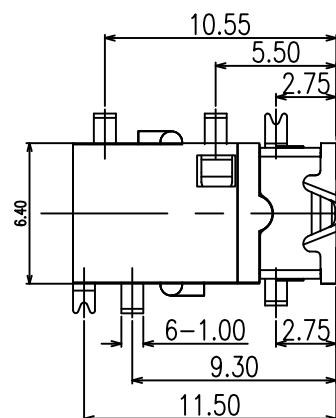

NOTE:

1.ELECTRICAL CHARACTERISTICS:

1.1 RATINGS:DC 30V 0.5A

1.2 CONTACT RESISTANCE: 100mΩ MAX

1.3 INSULATION RESISTANCE:100MΩ MIN

1.4 WITHSTAND VOLTAGE:AC 500V /1 Minute



1.5 WORKING TEMPERATURE: -25~+

1.6 SOLDER HEAT RESISTANCE: $245 \pm 5^{\circ}\text{C}$

2.MECHANICAL CHARACTERISTICS:

2.1 OPERATIONG FORCE:3~30N


2.2 SERVICE LIFE:5,000 Cycle.

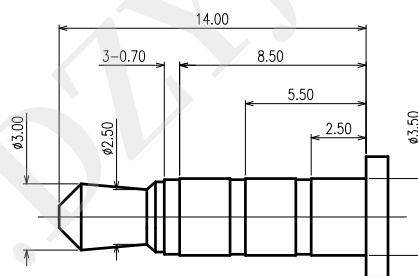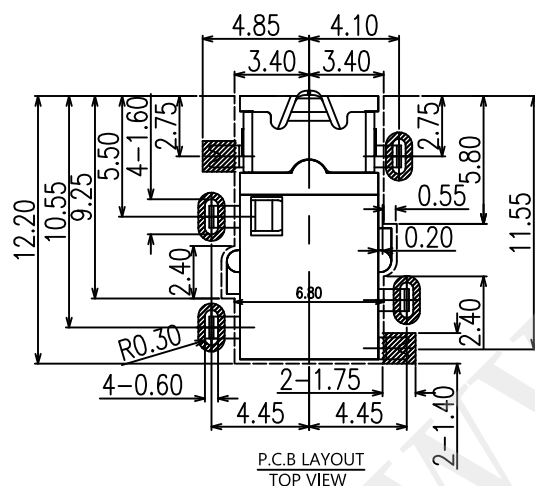

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X	±0.30	陈一鸣	2014-02-23	PJ-342无头沉板（四插两贴）	
X.XX	±0.25				
X.XXX	±0.15				
X: ±2"	X.X: ±0.5"	CHECKED BY:	DATE :	PART NO.	HYC02-PJ342SD-115
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]				APPROVED BY:	DATE :
SCALE: 1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1