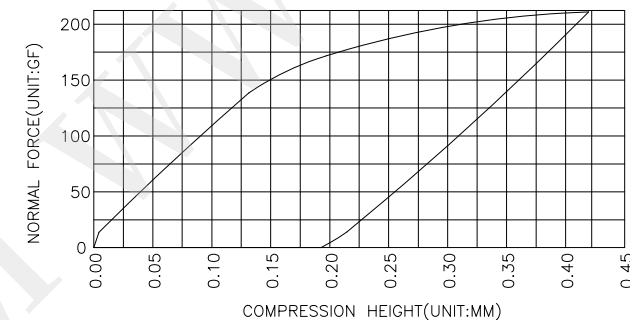


3D VIEW



NOTES:

1:MATERIAL:

1-1:STAINLESS STEEL THICKNE=0.10mm

2:FINISH:

2-1:3u"min Au PLATING ON CONTACT AREA,
1u"min Au PLATING ON SOLDER AREA,
50u"min NICKEL PLATING ON BASE AREA.

3:PRODUCT SPECIFICATIONS:

3-1:RATED CURRENT:1.0A/MAX
3-2:VOLTAGE RATING:1.50V/AC/DC/MAX
3-3:CONTACT RESISTANCE:80mΩ/MAX
3-4:OPERATING TEMPERATURE:-40°C~85°C

4:SALT SPRAY:24 HOURS

5:PACKING SPECIFICATION:REEL&TARE

6:DIMENSIONS MARKED □,CPK>1.33

7:ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC;

8:COMPLIANT TO RoHS&LEAD FREE



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X' ±2" X.X' ±0.5'

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

L1.85*W0.90*H2.60mm侧接弹片

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC-TXT1850926P

MOLD NO.

APPROVED BY:

邱敏

DATE :

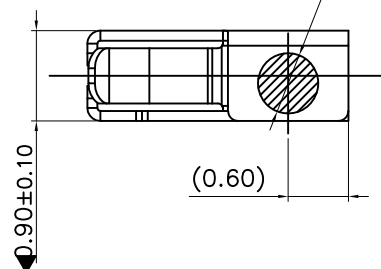
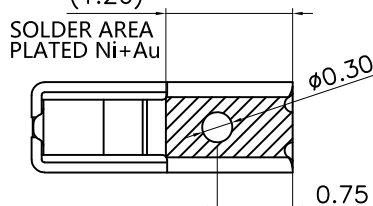

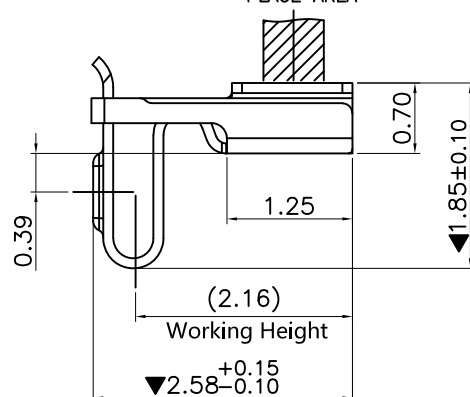


2014-02-23

DRAW NO:


HYC-2609171519

SHEET NO.

1 OF 1


ø0.60
(PICK&PLACE AREA)(1.26)
SOLDER AREA
PLATED Ni+AuOVER PICK&
PLACE AREA0.89Ref.
CONTACT AREA
PLATED Ni+Au

RECOMMENDED PCB LAYOUT

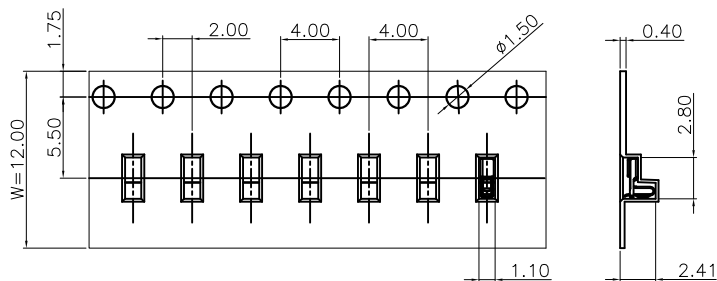
TOLERANCE±0.05(焊盘推荐图)
(FOR REFERENCE ONLY)

METAL MASK T=0.10

TOLERANCE±0.05(钢网推荐图)
(FOR REFERENCE ONLY)

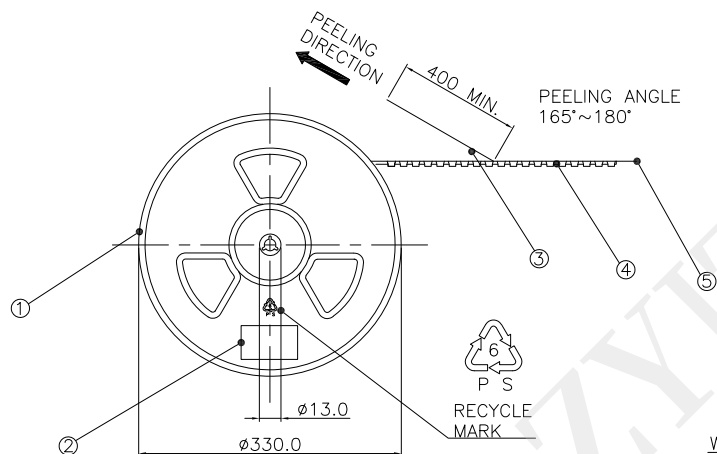


PULL OUT
IN THIS DIRECTION
引出方向



TOTAL
20LAYERS

PULL OUT
IN THIS DIRECTION/引出方向



W±0.40

⑤		ADHESIVE TAPE	
④		CARRIER TAPE	W12.0
③		TOP COVER	W7.50
②	1	LABLE	
①	1	ROLLER DISK	φ330
ITEM	QT'Y	NAME	SIZE



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5"

UNIT: mm [inch]

SCALE:1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

包装图

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

SHEET NO.

1 OF 1