
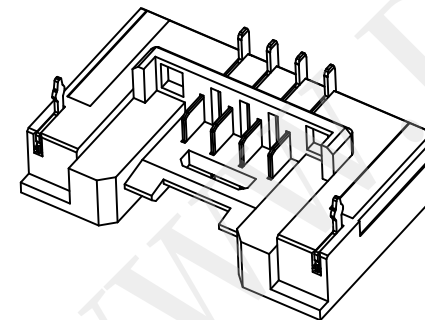


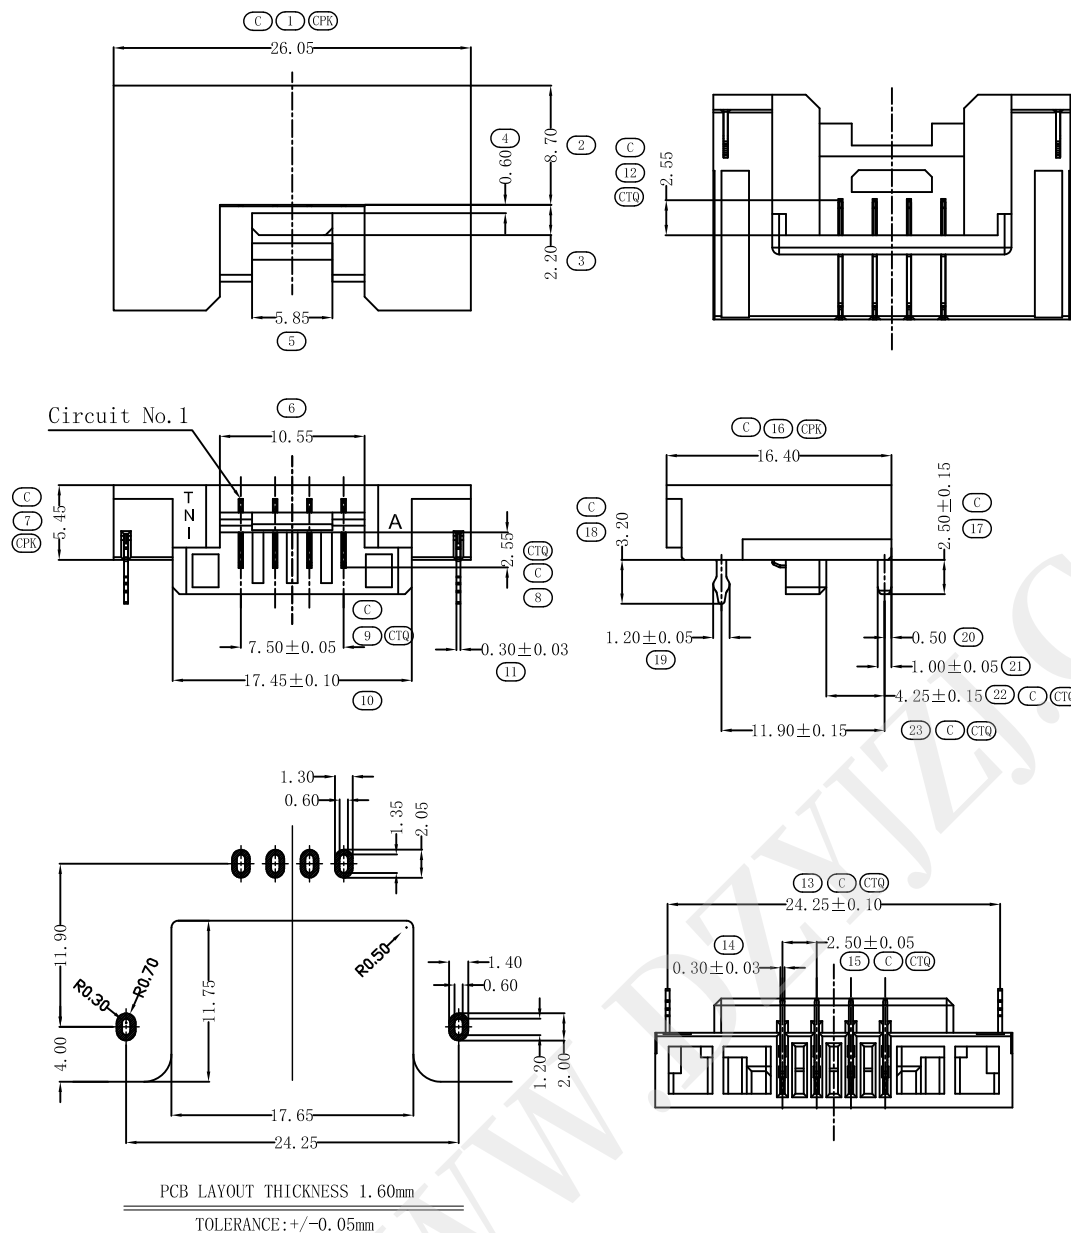

NOTES:

1. MATERIAL:

HOUSING: THERMOPLASTIC, UL 94V-0, BLACK;

CONTACT: COPPER ALLOY

2. FINISH:

CONTACT: Ni $1.3 \sim 3\mu\text{m}$, Sn $2 \sim 6\mu\text{m}$

SPECIFICATIONS:

VOLTAGE RATING: AC/DC 250V

CURRENT RATING: 2A PER PIN

INSULATION RESISTANCE: $10\text{G}\Omega$ MINCONTACT RESISTANCE: $30\text{m}\Omega$ Max.OPERATION TEMPERATURE: -40° TO $+85^\circ$

3. * IS FAI SIZE

4. C IS FIRST INSPECTION SIZE


5. CTQ IS INSPECTION SIZE.

6. CPK IS CPK SIZE

1	HOLD DOWN	2	BRASS T=0.30mm	Ni $1.3 \sim 3\mu\text{m}$ Sn $2 \sim 6\mu\text{m}$
2	CONTACT	4	BRASS T=0.30mm	Ni $1.3 \sim 3\mu\text{m}$ Sn $2 \sim 6\mu\text{m}$
3	HOUSING	1	LCP, UL94V-0	BLACK CLOCK
ITEM	NAME	Q' TY	MATERIAL	PLATING OR CLOCR



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: BTW 4P 5.45H CONNECTOR	
 UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC01-BTW04-545
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-2609231437
SCALE:1:1	SIZE: A4			SHEET NO.	1 OF 1