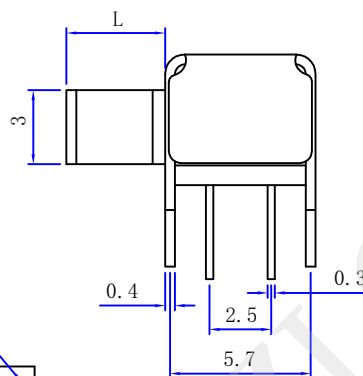
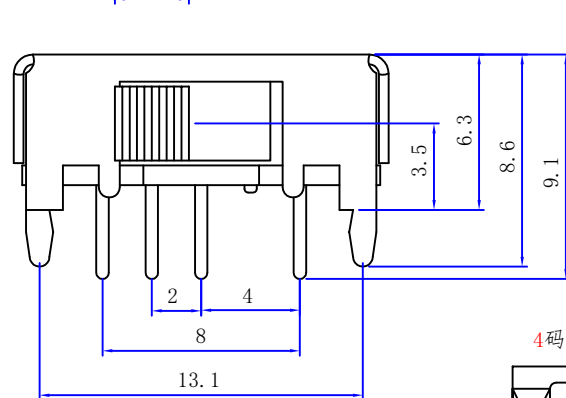
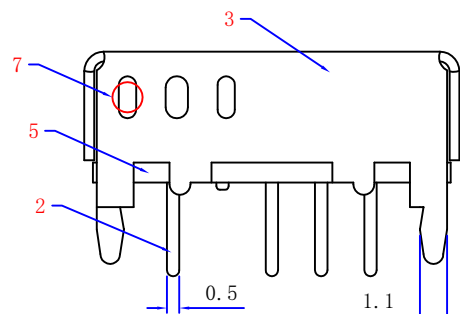
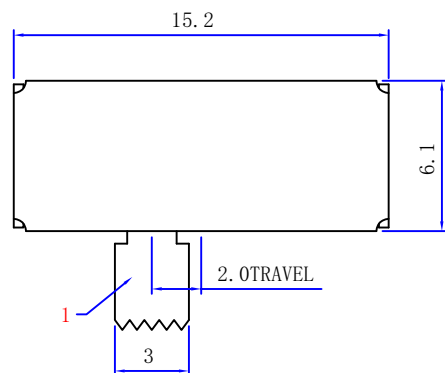


SCHMATIC

L=
3
4
5
6
7
8
9


电气性能参数:

1. 额定负载: DC50V 0.3A
2. 接触电阻: 100毫欧以下
3. 绝缘电阻: 100兆欧以上
4. 耐压: AC 500V
5. 力度: 250 ± 100 gf
6. 寿命: 10000次
7. 手焊: 350 ± 10 度

7	钢珠	碳 钢	1	原 色
6	弹 簧	碳 钢 线	1	原 色
5	底 板	冷 冲 板	1	原 色
4	码 片	磷 铜 带	2	镀 银
3	铁 壳	冷 轧 钢 带	1	镀 镍
2	端 子 脚	黄 铜 带	8	镀 银
1	胶 柄	P O M	1	黑 色
NO.	物 料 组 成	材 质	数 量	表 面 处 理



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 拨动开关	
 UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC02-SK-23D06-XX
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-2609241057
SCALE:1:1	SIZE: A4			SHEET NO.	1 OF 1