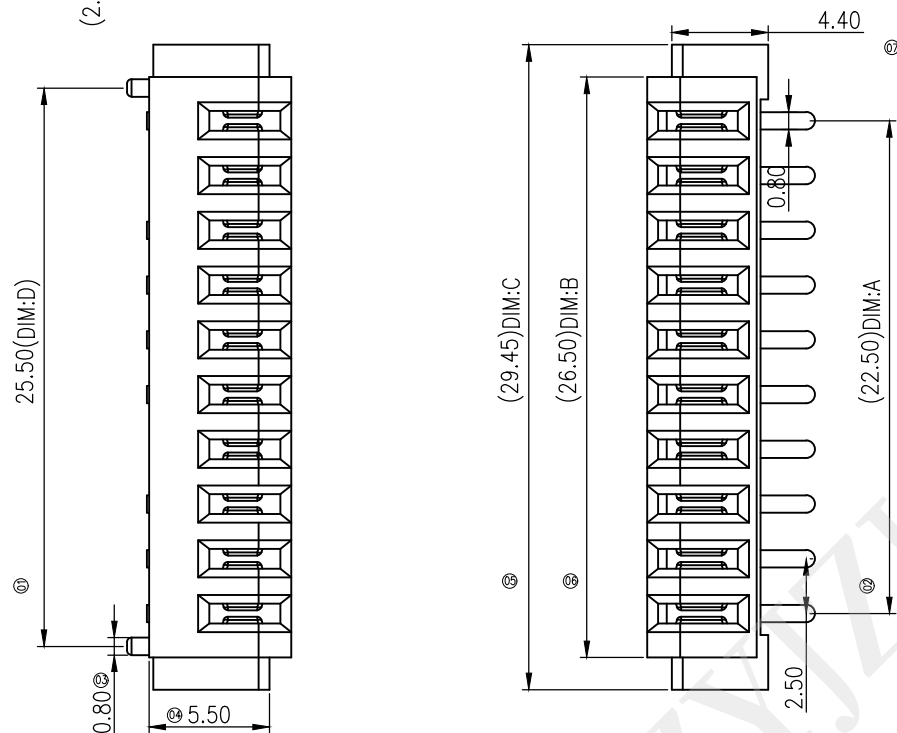
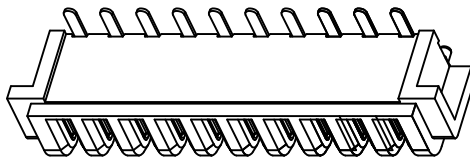
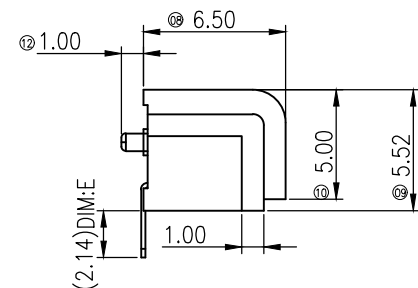


Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Current rating:7A

instant CURRENT:10A

Contact Resistance:30MΩ

Insulation Resistance:100MΩ

Dielectric Voltage:500V

Operdting Temperature:-40°~105°

No:of pins	Dimension				
	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
03	5.00	9.00	11.95	8.00	2.14
04	7.50	11.50	14.45	10.50	2.14
05	10.00	14.00	16.95	13.00	2.14
06	12.50	16.50	19.45	15.50	2.14
07	15.00	19.00	21.96	18.00	2.14
08	17.50	21.50	24.45	20.50	2.14
09	20.00	24.00	26.95	23.00	2.14
10	22.50	26.50	29.45	25.50	2.14




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X.* ±2* X.X* ±0.5*



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

2.5PH 立贴刀式电池座母座

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC-BMXX2565EFD

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2609101538

SHEET NO.

1 OF 1