

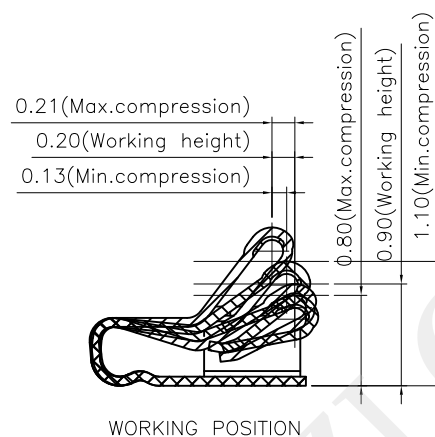
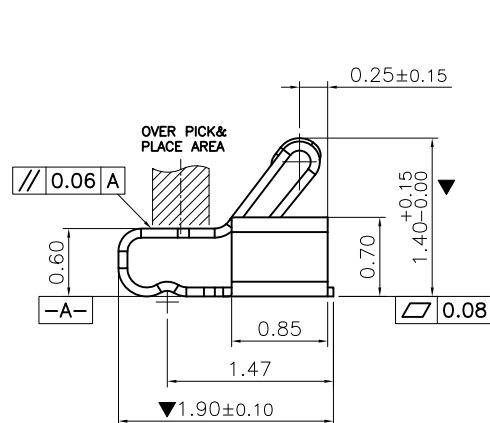
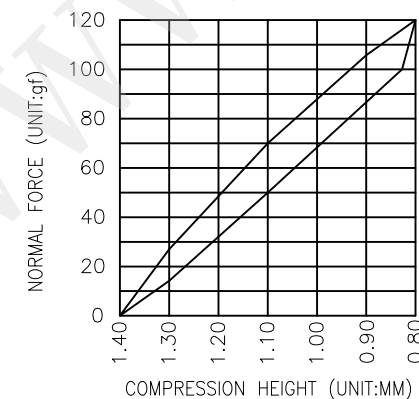


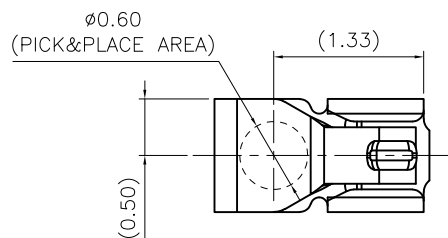


RECOMMENDED PCB LAYOUT
TOLERANCE±0.05(焊盘推荐图)
(FOR REFERENCE ONLY)



METAL MASK T=0.10
TOLERANCE±0.05(钢网推荐图)
(FOR REFERENCE ONLY)




- NOTES:
1:MATERIAL:
1-1:STAINLESS STEEL THICKNE=0.08mm
2:FINISH:
2-1:REFER TO THE SPECIFICATION DESCRIPTION TABLE.
3:PRODUCT SPECIFICATIONS:
3-1:RATED CURRENT:2.0A/MAX
3-2:VOLTAGE RATING:10.0V/AC/DC/MAX
3-3:CONTACT RESISTANCE:50mΩ/MAX
3-4:OPERATING TEMPERATURE:-40°C~85°C
3-5:NORMAL FORCE OF PRESS@0.90:0.50N MIN.
3-6:DURABILITY:1,500 CYCLES.
4:SALT SPRAY:SEE DETAILED LIST
5:PACKING SPECIFICATION:REEL&TARE
6:DIMENSIONS MARKED ■,CPK>1.33
7:ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC;
8:COMPLIANT TO RoHS&LEAD FREE




深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 天线弹片 L1.90*W1.00*H1.40
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-TXT191014A
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2609031552
			SHEET NO. 1 OF 1





PULL OUT
IN THIS DIRECTION
引出方向

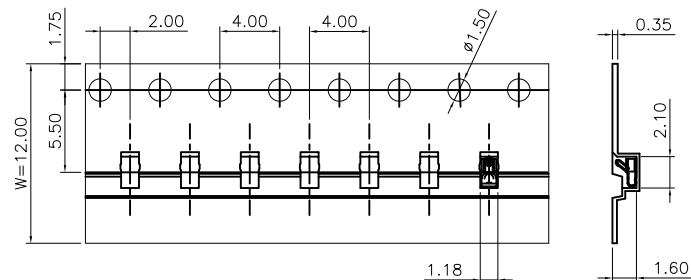

PULL OUT
IN THIS DIRECTION/引出方向

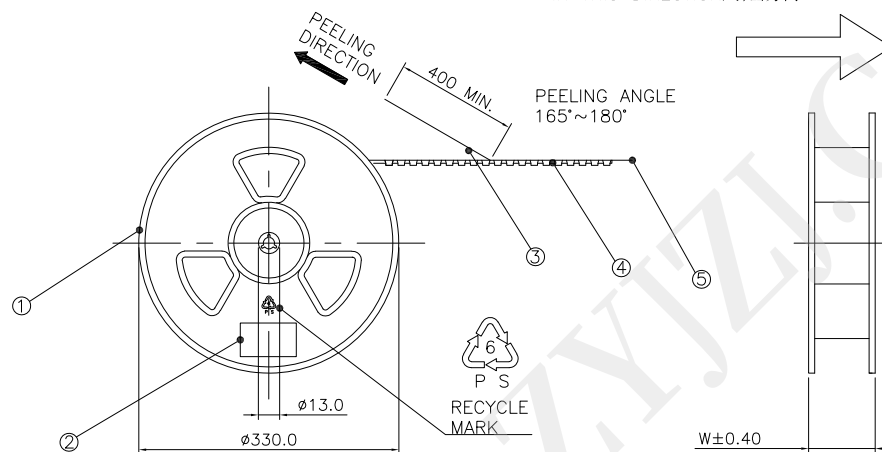

TOTAL
20LAYERS

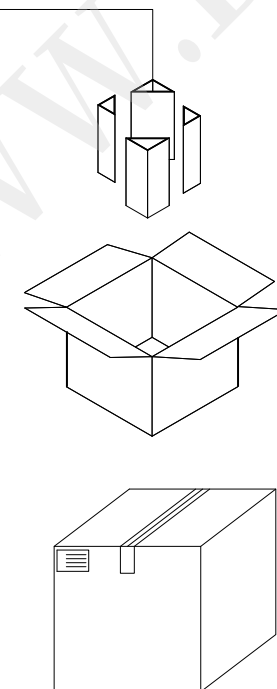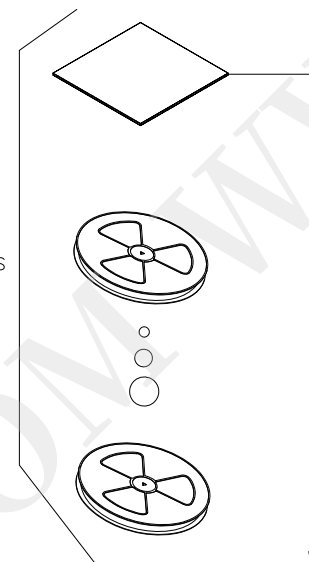

⑤		ADHESIVE TAPE	
④		CARRIER TAPE	W12.0
③		TOP COVER	W9.30
②	1	LABLE	
①	1	ROLLER DISK	φ330
ITEM	QT'Y	NAME	SIZE



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5"

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

包装图

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

SHEET NO.

1 OF 1