
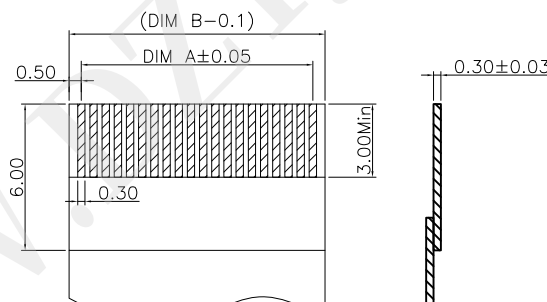
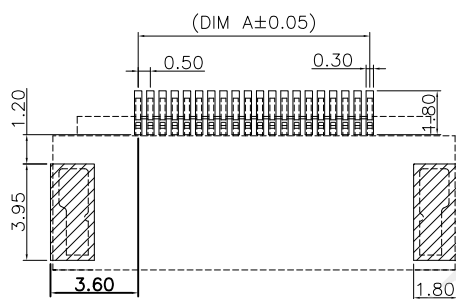
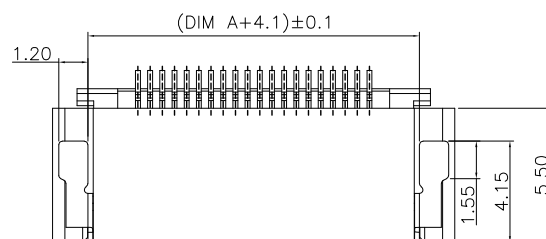
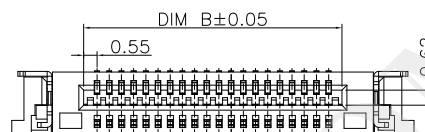
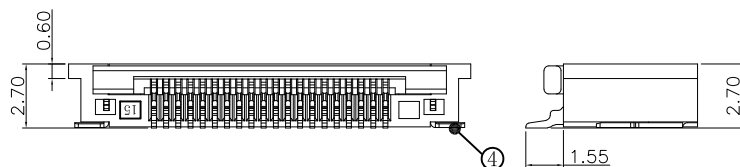
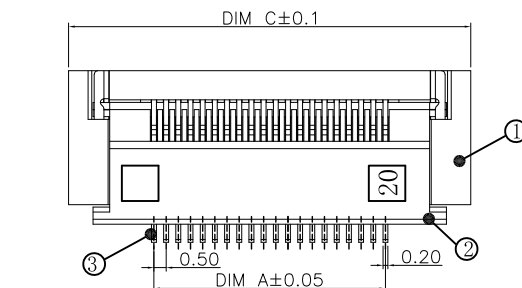
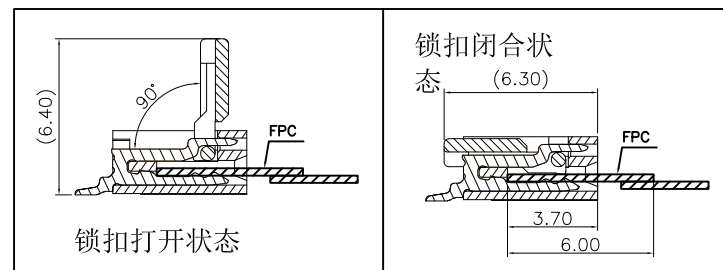


序号 (NO.)	品名 (TITLE)	材质 (Material)
①	0.5 后压腔式带扣散芯 (0#2.7) 0.5 Pitch back flip R/A with latch Housing (0#2.7)	LCP UL94V-0 本色 Natural
②	0.5 后压腔式带扣后盖 (0#2.7) 0.5 Pitch back flip R/A with latch Actuator (0#2.7)	LCP UL94V-0 黑色 Black
③	0.5 后压腔式带扣端子 (0#2.7) 0.5 Pitch back flip R/A with latch Terminal (0#2.7)	磷铜/表面镀锡 Copper Alloy/Tin Plating
④	0.5 后压腔式带扣焊片 (0#2.7) 0.5 Pitch back flip R/A with latch Solder tab (0#2.7)	黄铜/表面镀锡 Brass/Tin Plating



CKT	DIM A	DIM B	DIM C	CKT	DIM A	DIM B	DIM C
8	3.50	4.60	10.50	38	18.50	19.60	25.50
9	4.00	5.10	11.00	39	19.00	20.10	26.00
10	4.50	5.60	11.50	40	19.50	20.60	26.50
11	5.00	6.10	12.00	41	20.00	21.10	27.00
12	5.50	6.60	12.50	42	20.50	21.60	27.50
13	6.00	7.10	13.00	43	21.00	22.10	28.00
14	6.50	7.60	13.50	44	21.50	22.60	28.50
15	7.00	8.10	14.00	45	22.00	23.10	29.00
16	7.50	8.60	14.50	46	22.50	23.60	29.50
17	8.00	9.10	15.00	47	23.00	24.10	30.00
18	8.50	9.60	15.50	48	23.50	24.60	30.50
19	9.00	10.10	16.00	49	24.00	25.10	31.00
20	9.50	10.60	16.50	50	24.50	25.60	31.50
21	10.00	11.10	17.00	51	25.00	26.10	32.00
22	10.50	11.60	17.50	52	25.50	26.60	32.50
23	11.00	12.10	18.00	53	26.00	27.10	33.00
24	11.50	12.60	18.50	54	26.50	27.60	33.50
25	12.00	13.10	19.00	55	27.00	28.10	34.00
26	12.50	13.60	19.50	56	27.50	28.60	34.50
27	13.00	14.10	20.00	57	28.00	29.10	35.00
28	13.50	14.60	20.50	58	28.50	29.60	35.50
29	14.00	15.10	21.00	59	29.00	30.10	36.00
30	14.50	15.60	21.50	60	29.50	30.60	36.50
31	15.00	16.10	22.00	61	30.00	31.10	37.00
32	15.50	16.60	22.50	62	30.50	31.60	37.50
33	16.00	17.10	23.00	63	31.00	32.10	38.00
34	16.50	17.60	23.50	64	31.50	32.60	38.50
35	17.00	18.10	24.00	65	32.00	33.10	39.00
36	17.50	18.60	24.50	66	32.50	33.60	39.50
37	18.00	19.10	25.00	67	33.00	34.10	40.00
				68	33.50	34.60	40.50

技术指标 (Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围 (Temperature range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
3. 额定电压 (Rated voltage): 50V, AC/DC.
4. 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$ (Initial) per contact, $\leq 40\text{m}\Omega$ Change allowed.
5. 绝缘电阻 (Insulation resistance): $\geq 100\text{M}\Omega$.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 0.5PH 2.7H 后插后压FPC
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCD-05FPCXX-270
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2610080846
			SHEET NO. 1 OF 1