
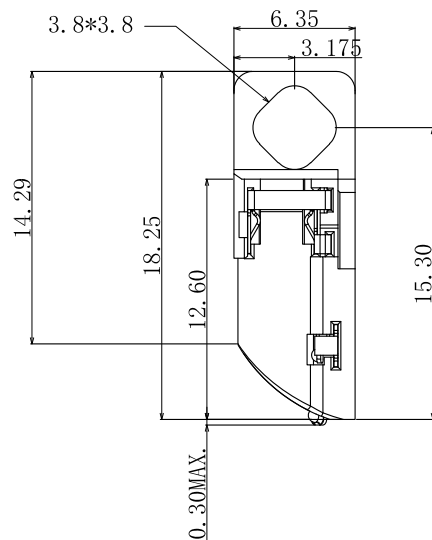

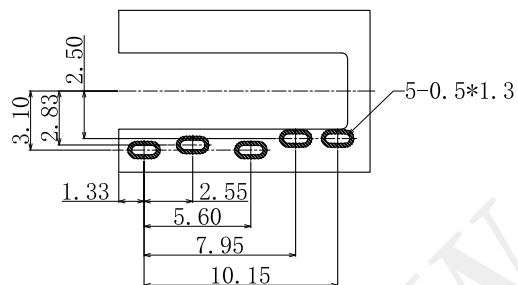
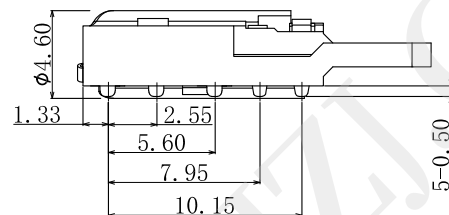



SCHEMATIC

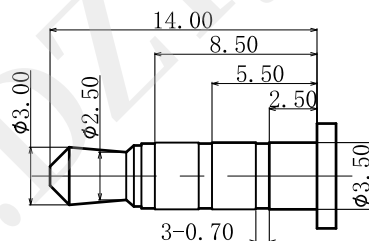

3D VIEW

P.C.B LAYOUT (All SIZES ± 0.05 mm)
TOP VIEW

(3.50mm 4 POLE PLUG DETAIL DRAWING)

NOTE:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 m Ω MAX.;
3. INSULATION RESISTANCE: 1000 Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

6	TERMINAL 5#	1	STAINLESS STEEL; THE BOTTOM OF THE NICKEL(40u" MIN.); GOLD (1u"MIN.) PLATING ON SOLDER AREA ;GOLD (1u"MIN.) PLATING ON CONTACT AREA	T=0.15mm
5	TERMINAL 4#	1		T=0.15mm
4	TERMINAL 3#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL(40u" MIN.); GOLD (1u"MIN.) PLATING ON SOLDER AREA ;GOLD (1u"MIN.) PLATING ON CONTACT AREA	T=0.2mm
3	TERMINAL 2#	1		T=0.2mm
2	TERMINAL 1#	1		T=0.2mm
1	HOUSING	1	PPA COLOR BLACK	
ITEM	NAME	QTY	DESCRIPTION	NOTE



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: $\phi 3.5$ mm耳机座
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC-PJ35A072-185
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2610101556
			SHEET NO. 1 OF 1