
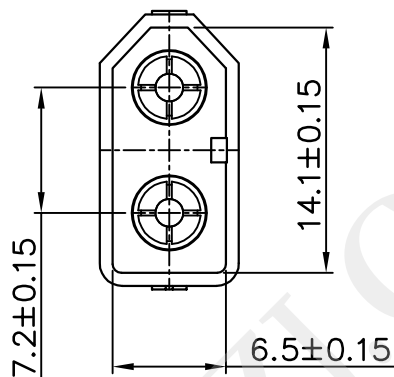
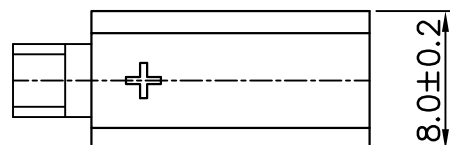
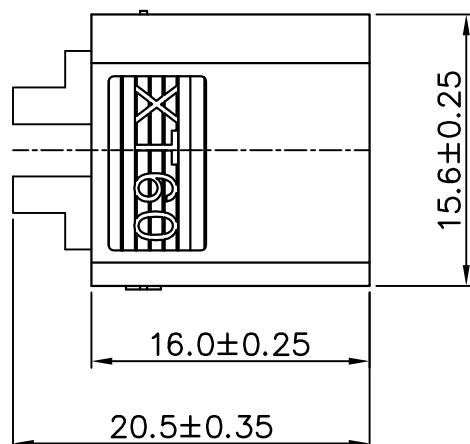


Specifications:

- 1) Material:
Housing: PA66 UL94V-0, Yellow&Black
Terminal: Copper Alloy, Plated
- 2) Current rating (额定电流): 30A DC.
- 3) Voltage rating (额定电压): 500V DC.
- 4) Instantaneous current (瞬时电流): 60A DC.
- 5) Contact resistance (接触电阻): 0.6mΩ Max
- 6) Insulation resistance (绝缘电阻): 1000MΩ Min.
- 7) Temperature range (环境温度): -25°~+105°.
- 8) Male and female plug pairing force: (1.8~4.5)Kgf


B	Male Terminal	2PCS	Copper Alloy	Plated	
A	Female Shell	1PCS	PA66	UL94V-0	
Item	Component	Q'ty	Material	Finished	Remarks

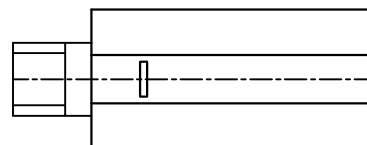

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.' ±2" X.X' ±0.5'



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

XT60 2P 公插头

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC-XT60M-2P-205

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2610101110

SHEET NO.

1 OF 1