

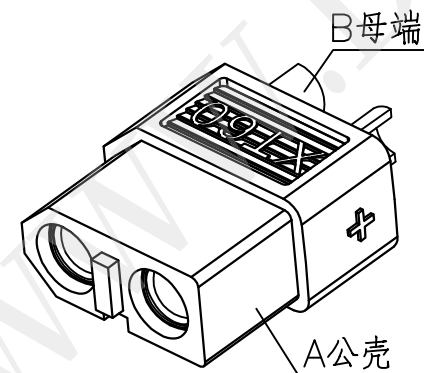
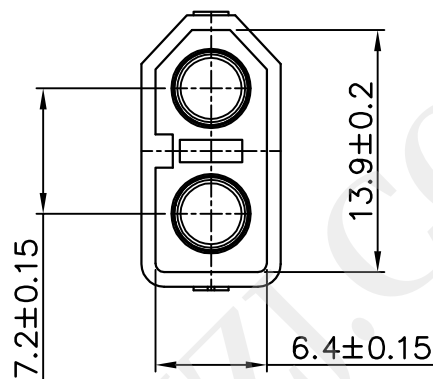
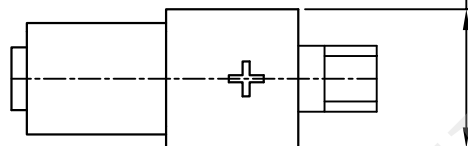


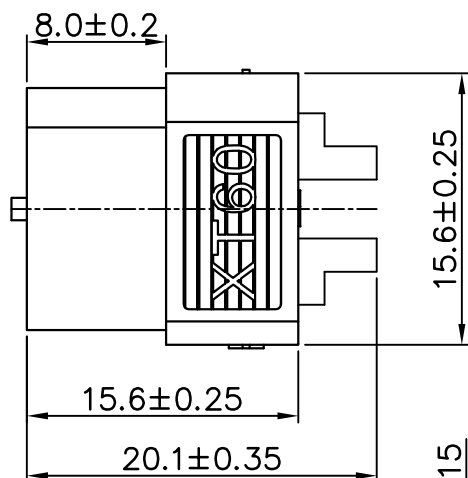

Specifications:

- 1) Material:
Housing: PA66 UL94V-0, Yellow&Black
Terminal: Copper Alloy, Plated
- 2) Current rating(额定电流): 30A DC.
- 3) Voltage rating(额定电压): 500V DC.
- 4) Instantaneous current(瞬时电流): 60A DC.
- 5) Contact resistance(接触电阻): 0.6mΩ Max
- 6) Insulation resistance(绝缘电阻): 1000MΩ Min.
- 7) Temperature range(环境温度): -25°~+105°.
- 8) Male and female plug pairing force: (1.8~4.5)Kgf

B	Female Terminal	2PCS	Copper Alloy	Plated	
A	Male Shell	1PCS	PA66	UL94V-0	
Item	Component	Q'ty	Material	Finished	Remarks

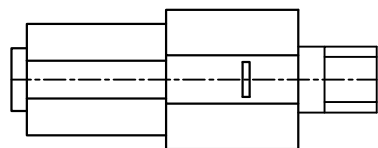

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5" UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: XT60 2P 母插头	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-XT60F-2P-201
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2610101103
			SHEET NO.	1 OF 1