
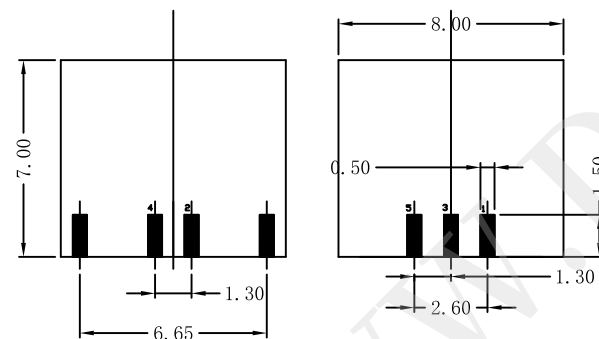
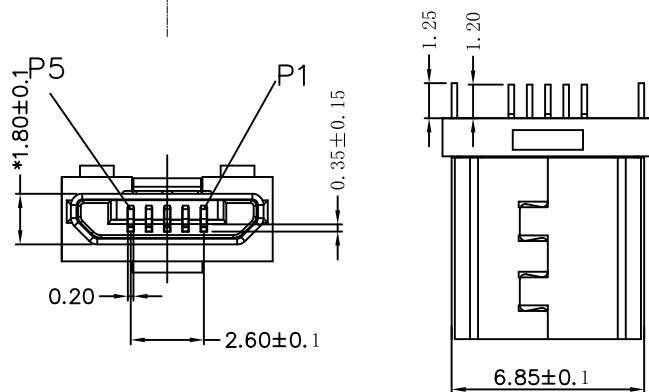


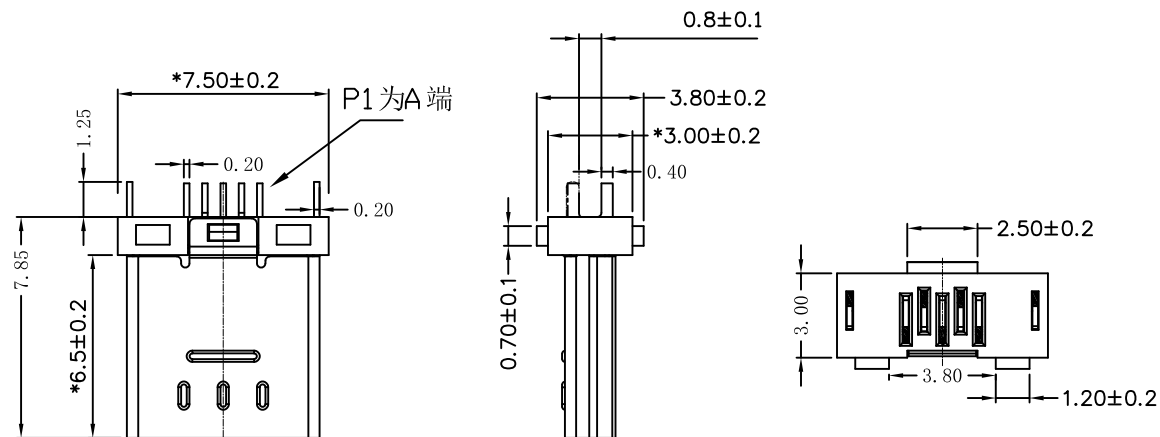

RECOMMENDED P.C.B. LAYOUT (T:0.8mm)

1.材质:

1-1. 塑胶件: LCP,UL 94V-0,颜色:黑色.

1-2. 端子: 黄铜,镍底30u".接触区镀金G/Fu".

焊接区镀锡50u"

1-3. 外壳: 不锈钢,整体镀可焊镍50u"

2.电气特性:

2-1. 额定电压: 20V AC MAX.

额定电流: 1.5A MAX.

2-2. 接触阻抗: 30mΩ, MAX.

2-3. 绝缘阻抗: 1000MΩ, MIN.

2-4. 耐电压: 500V AC FOR 1 MINUTE.

2-5. 操作温度: -30℃~+85℃

3.机械特性:

3-1. 插入力: 35N MAX.

3-2. 拔出力: 3N MIN.

4.耐久: 5000次



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MICRO USB 5P 公头夹板0.8 超短7.85
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC280-USB05-080
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4			DRAW NO: HYC-2610121137
			SHEET NO. 1 OF 1