
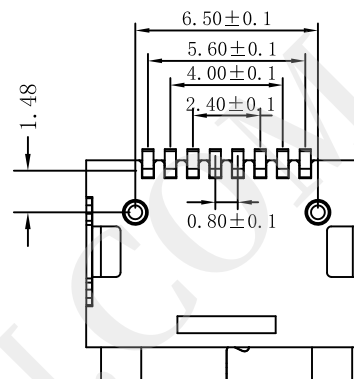
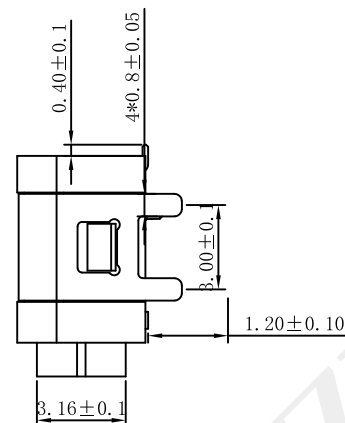
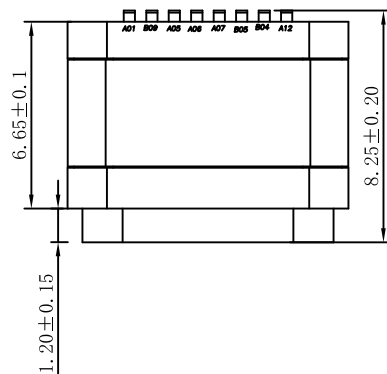

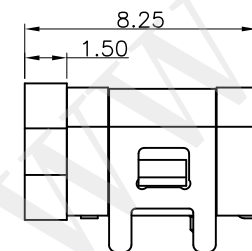




加防水圈示意图



NOTE:

1. MATERIAL:


- 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; Black Color
- 1.2 CONTACT: C7025 (T=0.20mm)
- 1.3 SHELL: STAINLESS STEEL (T=0.20mm)
- 1.4 MID PLATE: STAINLESS STEEL (T=0.15mm)

2. ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 10mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
- 2.4 INSULATION RESISTANCE 100MΩ Min
- 2.5 OPERATING TEMPERATURE: -40° C ~ 85° C


3. MECHANICAL CHARACTERISTICS:

- 3.1 MATING FORCE: 5~20 N.
 - 3.2 UNMATED FORCE: 8~20N INITIAL TEST; 6~20N DURABILITY AFTER TEST
 - 3.3 DURABILITY: 10,000 CYCLES
4. PLATING
- 4.1 TERMINAL CONTACT: Au 3u'' PLATING ON CONTACT AREA; TIN 50u'' Min TING ON SOLDER TAIL, SN 80u'' Min UNDERPLATING OVERALL
 - 4.2 SHELL: 50u'' Min. NICKEL ALL OVER,
 - 4.3 MID PLATE: 50u'' Min. NICKEL ALL OVER,

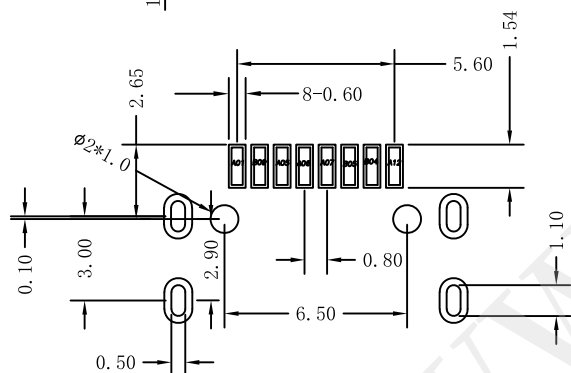



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2° X.X' ±0.5°	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 防水母座8P 板上SMT L=7.85带柱
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC588-USBC08-785
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2610121146
			SHEET NO. 1 OF 1

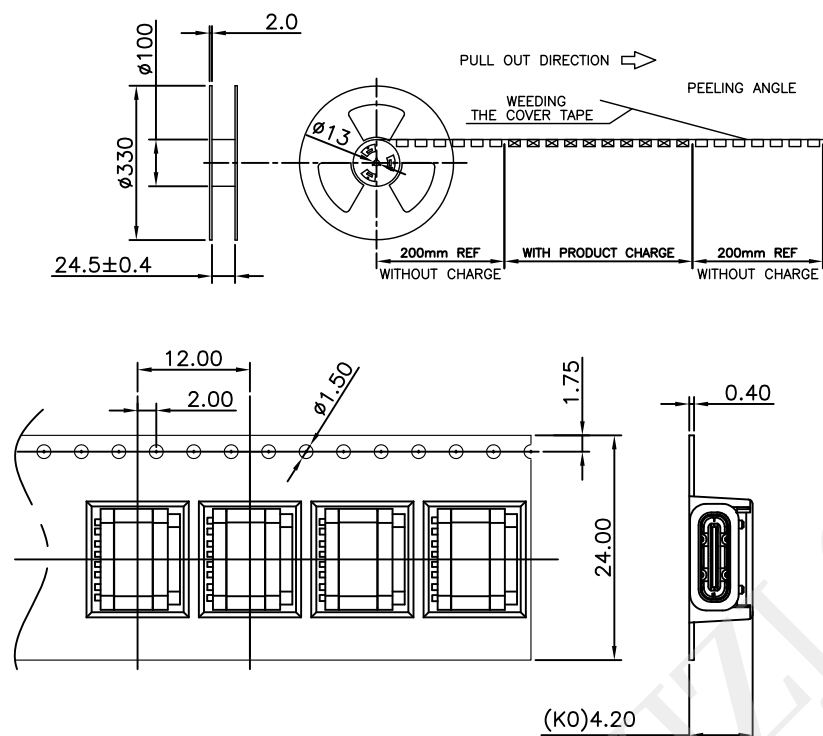

注意：

1. 材料:
纸箱:纤维板, 瓦楞, 双层壁。
胶带:聚苯乙烯, 耐热温度:120℃, 白。
卷筒:聚苯乙烯, 耐热温度:70℃, 蓝色。
包装:聚乙烯, 耐热温度:100℃。
2. 剥离强度:0.1 ~ 1.3 N(10 ~ 130克)
3. 脱皮速度:300mm /min。
4. 每个袋子都应包括干燥剂*1。
5. 外箱上贴号物料标签及RoHS标签
6. 同一产品只能装同一纸箱, 不允其它产品;
7. 包装后, 每盘真空包装

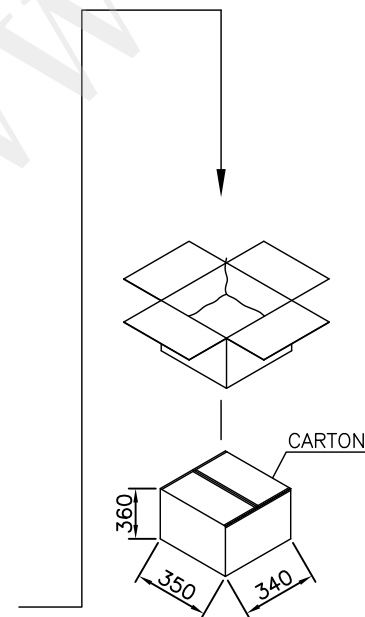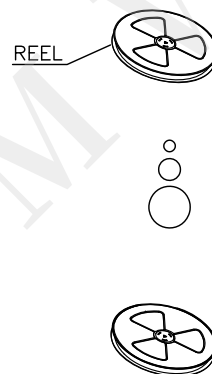


NOTE:

1.QUANTITY:600 PCS/RELL,6600PCS/CARTON.



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	包装图	
X.XX ±0.25					
X.XXX ±0.15		CHECKED BY:	DATE :	PART NO.	
X.* ±2* X.* ±0.5*		马跃	2014-02-23	MOLD NO.	
				APPROVED BY:	DATE :
UNIT: mm [inch]		邱敏	2014-02-23	SHEET NO.	1 OF 1
SCALE:1:1	SIZE: A4				