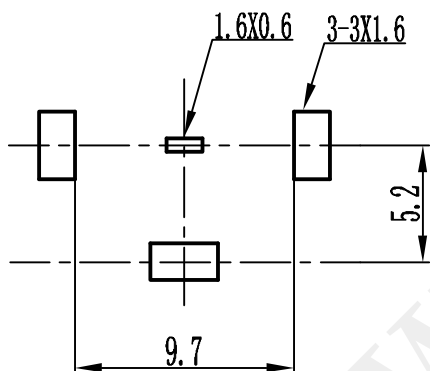
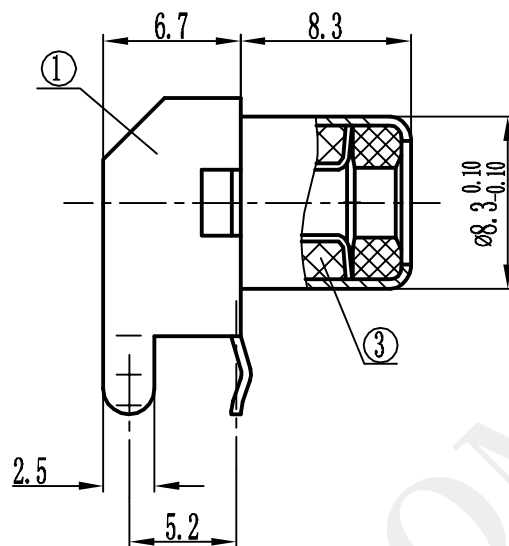
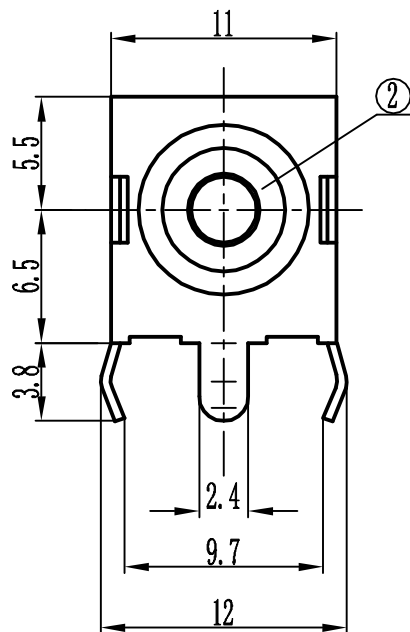


电路图

技术要求:

使用温度范围: -40℃~70℃

额定负荷: DC50V 0.2A

接触电阻: ≤0.03Ω

绝缘电阻: ≥100MΩDC500V

耐压: AC500V (50HZ)/min

插拔力: 3~25N

寿命: 10000次

X (颜色)

黑/black (B)

红/red (R)

橙/orange (O)

绿/green (G)

白/white (W)

4	插针	1	黄铜 t=0.25
3	垫胶圈	1	PBT
2	垫片籽	1	PBT
1	铜套	1	黄铜 t=0.36
序号	部件名称	数量	备注



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2° X.X' ±0.5°

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

PART NAME:

AV 插座

CHECKED BY:

马跃

DATE:

2014-02-23

PART NO.:

HYC-AV-8.4-3-X

APPROVED BY:

邱国夷

DATE:

2014-02-23

DRAW NO.:

HYC-180816281

SHEET NO.:

1 OF 1