

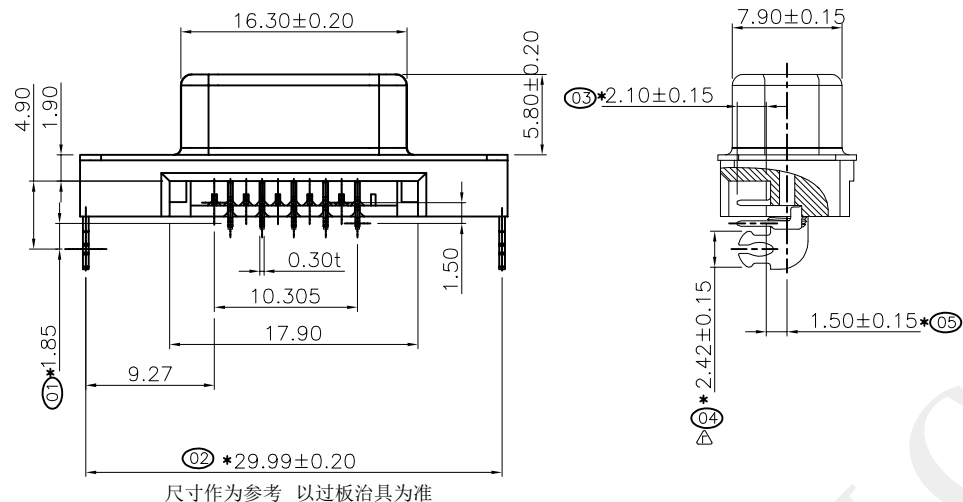
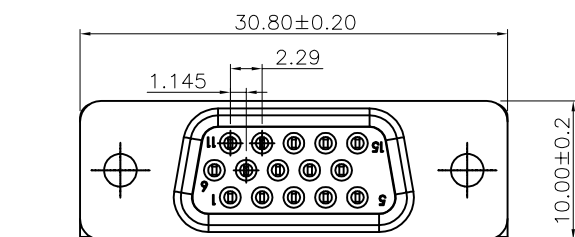


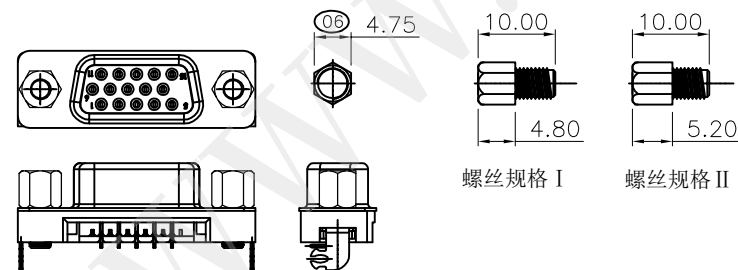

尺寸作为参考 以过板治具为准

Recommended P.C.B Layout (component side)

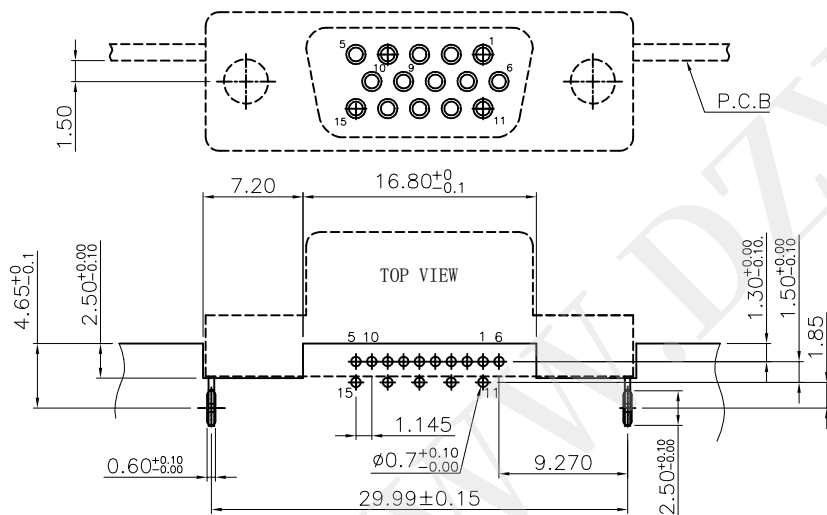

接触阻抗:30 mΩ MAX

耐电压:500V AC

绝缘阻抗:1000 MΩ MIN

寿命测试:1500次, 插拔速度300次/小时

插入力MAX: 4.5Kgf

拔出カMIN: 0.45Kgf

盐雾测试: 24H

工作温度: $-30^{\circ} \sim +85^{\circ}$

5	RIVET	COPPER ALLOY	Au/Ni PLATED
4	SHELL	SPCC	Au/Ni PLATED
3	FORK	SPCC	Tin PLATED
2	TERMINAL	COPPER ALLOY	Au/Tin PLATED
1	HOUSING	HIGH TEMP PLASTIC	UL94V-0
NO.	PART NAME	DESCRIPTION	REMARK



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"				SLIM VGA 15P反向沉板插件 CH1.5	
 UNIT: mm [inch]		CHECKED BY:	DATE :	PART NO.	HYC26-VGA15B-150
		马跃	2014-02-23	MOLD NO.	
SCALE:1:1 SIZE: A4		APPROVED BY:	DATE :	DRAW NO:	HYC-2610150914
		邱敏	2014-02-23	SHEET NO.	1 OF 1