


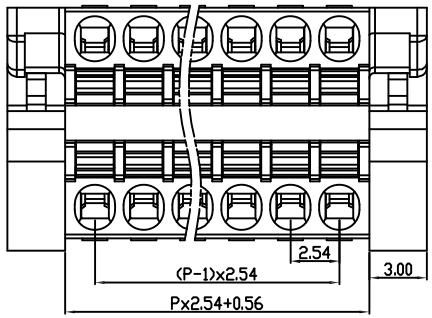


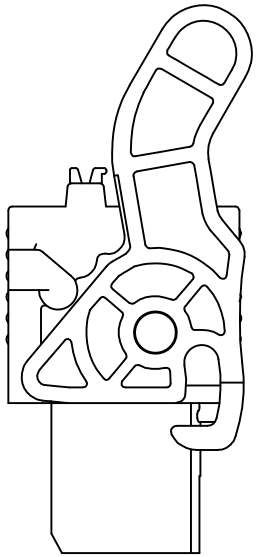

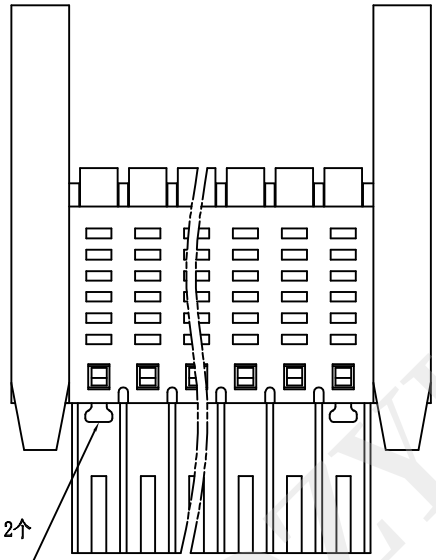

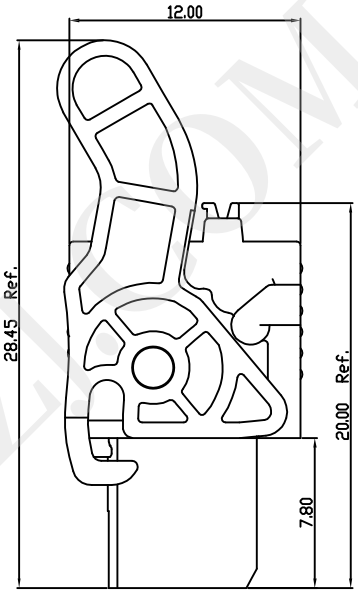

UL/CUL 技术 参数 UL/CUL Technical Data				
等 级 Use Group		B	C	D
额定电压 Rated Voltage	[V]	150	-	-
额定电流 Rated Current	[A]	5	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded	[AWG]	28-20		
耐电压 Withstanding Voltage		AC1300V/1Min		
IEC 技术参数 IEC Technical Data				
过电压类别 Overvoltage Category		III	III	II
污染等级 Contamination Class		3	2	2
额定电压 Rated Voltage	[V]	-	160	320
额定电流 Rated Current	[A]	-	6	6
额定冲击电压 Impulse withstand voltagea	[KV]	-	2.5	2.5
导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible	[mm²]	0.5		
材 料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Imflammability		UL94V-0		
导体材料 Contactor Material		铜合金 Copper alloy		
导体表面镀层 Contactive Coating		镀锡 Tin Plated		
一般参数 Other Data				
间距 Pitch	[mm]	2.54		
极数 Poles	[P]	2x(02~24)		
剥线长度 Stripping Length	[mm]	8		
螺丝 Screw/扭矩 Torque(Max)	[N.m]	-		
工作温度 Operating temperatur	[°C]	-40~+105		
引针尺寸 Pin Dimensions	[mm]	-		
PCB板孔径 PCB Hole Diameter	[mm]	-		

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.° ±2° X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 弹簧式接线端子 2.54PH 双层直头带耳扣
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC224-JXD2XN-254
			MOLD NO.
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2610201447
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM