


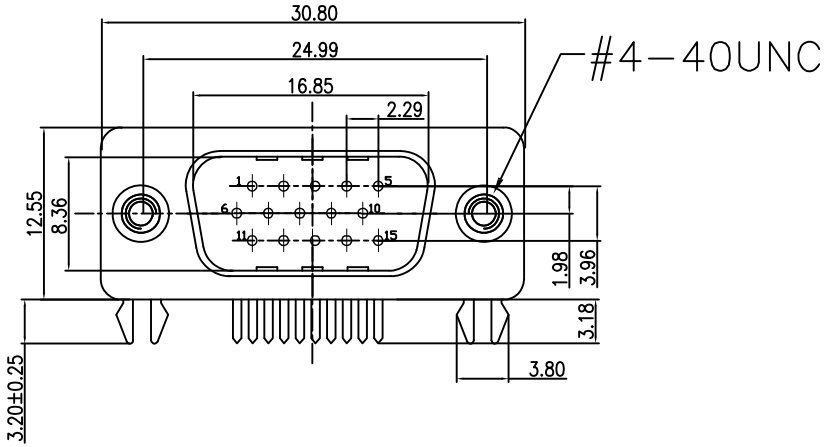


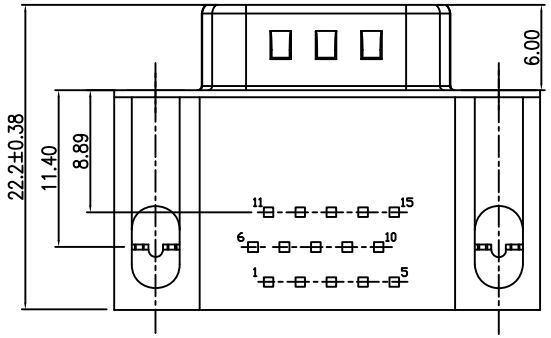

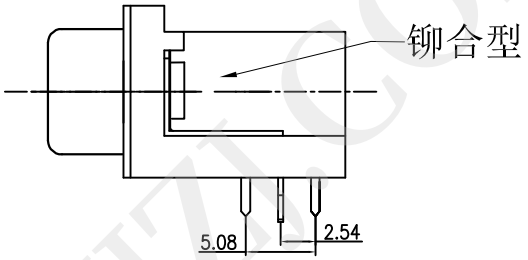

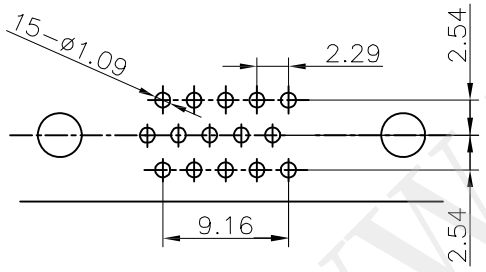

PCB Holes Diagram(Top View)

NOTE:
1.MATERIAL:
- 1.1 HOUSING:PBT, UL94V-0,COLOR:BLACK.
- 1.2 TERMINAL:COPPER ALLOY.
- 1.3 SHELL:SPCC
- 1.4 HARPOON:SPCC .
- 4.5 RIVET:COPPER ALLOY.

2. PLATING:
- 2.1 CONTACT: SELECTIVE GOLD PLATED ON CONTACT AREA
  80u" Min. TIN PLATED ON SOLDER TAIL
  50u" Min. NICKEL UNDER-PLATED
- 2.2 SHELL:50u" Min, NICKEL PLATED OVERALL
- 2.3 HARPOON:50u" Min, TIN PLATED OVERALL
- 2.4 RIVET:50u" Min, NICKEL PLATED OVERALL

3. SPECIFICATIONS:
- VOLTAGE: 250 VAC(RMS) MAX.
- CURRENT RATING: 3 AMPERE PER CONTACT
- CONTACT RESISTANCE: 25 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN.
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(RMS)
- OPERATING TEMPEROTURE:-25°C ~ +85°C

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: HDR8.89 15P 公座铆合
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC212-VGA15A-889
			MOLD NO.
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2401021050
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM