



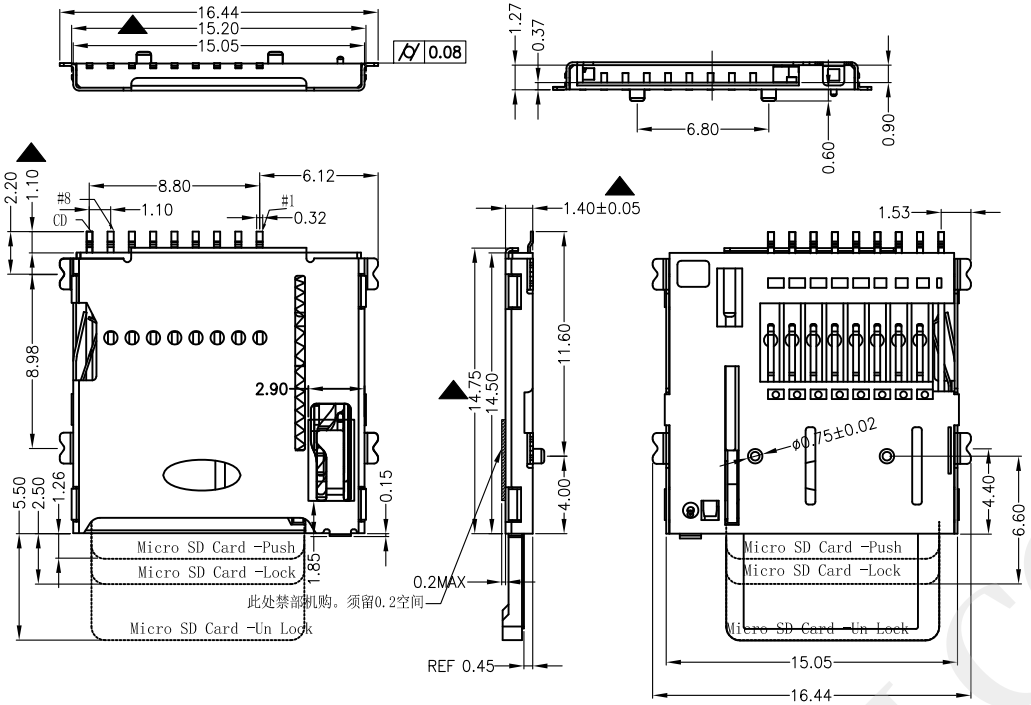






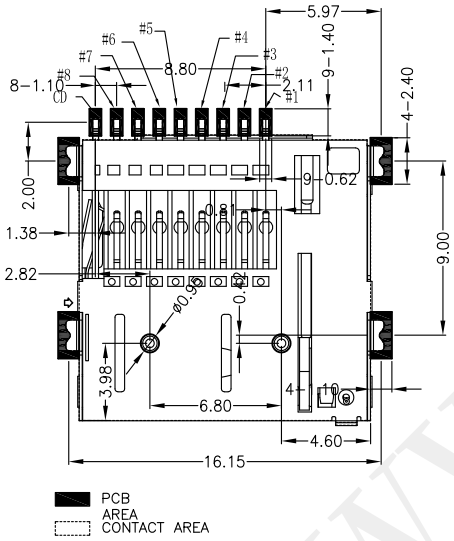



PIN NO.	PIN ASSIGNMENT	
1#	DAT2	信号
2#	CD/DAT3	信号
3#	CMD	数据输入
4#	VDD	电压/电源
5#	CLK	时钟
6#	VSS	接地
7#	DAT0	信号
8#	DAT1	信号

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic,
UL 94V-0. COLOR"BLACK LCP
(塑胶: 黑色LCP，防火等级UL 94V-0)
SHELL: SUS301
Contact: Copper Alloy (磷铜C5210)
弹簧: 琴钢线
拉杆: SUS301

PLATING:

Contact:All Ni50u,contact area 1u Au,Pad 0.8U Au
(接触端子电镀: 全部镍底50U，接触区域1U金，焊脚处0.8U金最少)
Shell:All 50u Ni,Pad 0.8 Au
(外壳电镀: 镍底50U，焊接处0.8U金)

Electrical:

Current Rating :0.5Amps max(额定电流:0.5A最大)
Voltage Rating :5V AC/DC(额定电压:5V AC/DC)
Ambient Temperature Range :-20° C~+60° C(工作温度: -20度到+60度)
Storage Temperature Range :-40° C~+70° C (工作环境: -20度到+80度)
Ambient Humidity Range :95% R.H. Max. (上锡效果: 95%以上)
Contact Resistance:100mΩmax. (端子接触电阻: 100m 最大)
Insulation Resistance:1000MΩmin./500VDC(绝缘阻抗100兆欧最小)
Mating Cycles:1,0000 Insertions (寿命: 10000次)
产品耐温温度: 260° C

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X' ±0.5'	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: TF PUSH 外焊1.4H
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO. HYC07-TF09-140
			MOLD NO.
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE: 2014-02-23	DRAW NO: HYC-2611021501
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM