
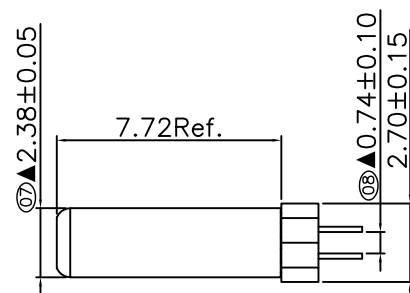
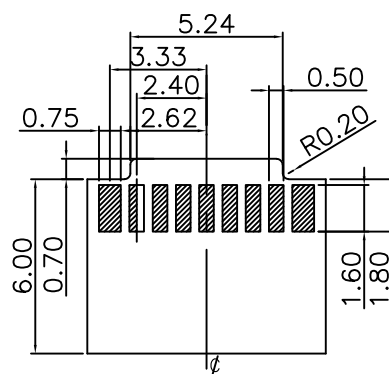
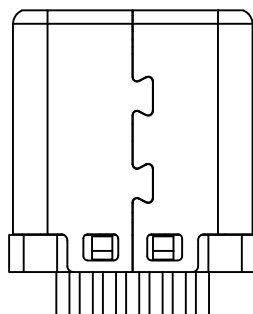


## NOTES:

1. CURRENT RATING:  
3.0A MAX.
2. DIELECTRIC WITHSTAND VOLTAGE:  
100VAC.
3. TEMPERATURE RANGE:  
-30 °C ~ 85 °C.
4. CONTACT RESISTANCE:  
40 MILLIONHM MAX.
5. INSULATION RESISTANCE:  
100 MEGOHMS MIN.
6. INSERTION FORCE :  
5N~20N.
7. UNMATING FORCE:  
8N~20N.
8. DURABILITY:  
10,000 CYCLES.
9. ALL PRODUCTS COMPLY WITH RoHS  
ENVIRONMENTAL REQUIREMENTS.
- 10: MARK "▼" AS THE FOCUS,  
FIRST ITEM INSPECTION.
- 11: MARK "⊗" TO MEASURE DIMENSIONS  
FOR FAI.

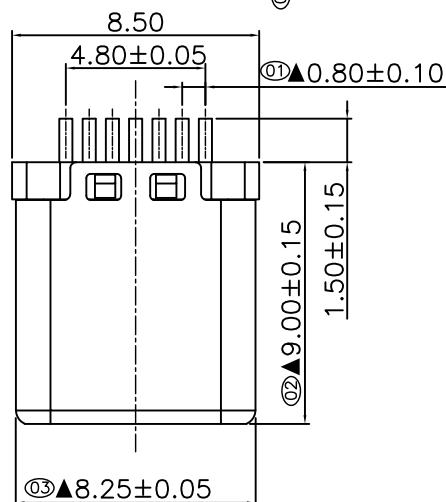

RECOMMENDED PCB LAYOUT  
PCB THICKNESS 0.8mm  
GENERAL TOLERANCE ±0.05

| A1  | A2  | A3  | A4   | A5  | A6 | A7 | A8  | A9   | A10 | A11 | A12 |
|-----|-----|-----|------|-----|----|----|-----|------|-----|-----|-----|
| GND |     |     | VBUS | CC1 | D+ | D- |     | VBUS |     |     | GND |
| GND |     |     | VBUS |     | D- | D+ | CC2 | VBUS |     |     | GND |
| B12 | B11 | B10 | B9   | B8  | B7 | B6 | B5  | B4   | B3  | B2  | B1  |

TABLE:


|             |            |                           |                                                                |
|-------------|------------|---------------------------|----------------------------------------------------------------|
| INSERT MOLD | SHELL      | Stainless Steel;T=0.15mm; | Ni:50u"Min                                                     |
|             | LATCH      | Stainless Steel;T=0.3mm;  | Electroplated semi-nickel<br>matte tin;50u"Min;                |
|             | EMC SPRING | Stainless Steel;T=0.10mm  | -----                                                          |
|             | CONTACT    | Copper Alloy;T=0.18mm     | Ni:50u"Min;<br>Au:CONTACT AREA:1u",<br>Solder AREA:Sn 50-100u" |
|             | PLASTIC    | LCP(G.F30%) BLACK.        | -----                                                          |
| P/N         | PART NAME  | MATERIALS                 | FINISH                                                         |




深圳市华宇创精密电子有限公司

|                                                                           |                    |                      |                                                         |  |
|---------------------------------------------------------------------------|--------------------|----------------------|---------------------------------------------------------|--|
| TOLERANCE:<br>X.X ±0.30<br>X.XX ±0.25<br>X.XXX ±0.15<br>X' ±2" X.X' ±0.5' | DRAWN BY :<br>陈一鸣  | DATE :<br>2014-02-23 | PART NAME:<br>USB TYPE C 公座14P(7+7P) 铜壳壳 夹板式无接地 L=9.0mm |  |
|                                                                           | CHECKED BY:<br>马跃  | DATE :<br>2014-02-23 | PART NO.<br>HYC674-USBC14-090                           |  |
|                                                                           | APPROVED BY:<br>邱敏 | DATE :<br>2014-02-23 | DRAW NO:<br>HYC-2601071039                              |  |
|                                                                           | SCALE:1:1          | SIZE: A4             | SHEET NO.<br>1 OF 1                                     |  |


包装示意图:

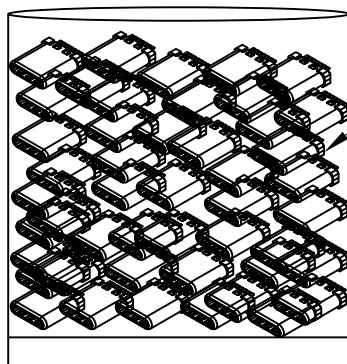


每袋500PCS

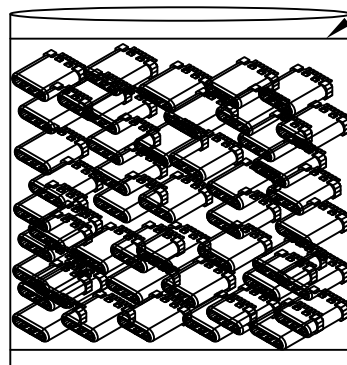

热封线

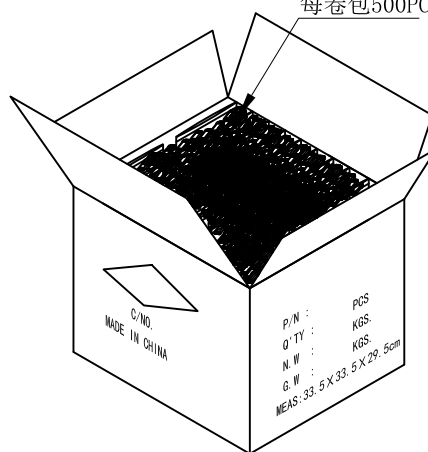

每卷包500PCS, 每箱装20袋 (10000PCS)

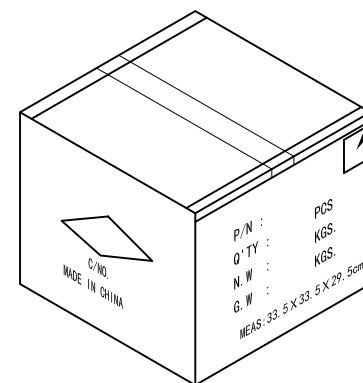


产品外标签

## 备注:

1. 蒋产品装入PE袋中, 每袋装500PCS, 装完成后需用热熔机卦口.
2. 在每袋装OK的PE袋上, 贴上物料和RoHS标签装入纸箱内. 每箱装20袋 (10000PCS).
3. 纸箱用封箱带将其封好, 胶带要求工字型, 不可遮住标签;
4. 如果客户对包装标签另有要求, 请按客户要求作业; 有未满足之零数箱需用缓冲材料填充;



深圳市华宇创精密电子有限公司

|                                                                                                                                |                    |                      |                   |        |
|--------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------|-------------------|--------|
| TOLERANCE:<br>X.X ±0.30<br>X.XX ±0.25<br>X.XXX ±0.15<br>X.* ±2* X.X* ±0.5*                                                     | DRAWN BY :<br>陈一鸣  | DATE :<br>2014-02-23 | PART NAME:<br>包装图 |        |
|                                                                                                                                | CHECKED BY:<br>马跃  | DATE :<br>2014-02-23 | PART NO.          |        |
| <br>UNIT: mm [inch]<br>SCALE:1:1 SIZE: A4 | APPROVED BY:<br>邱敏 | DATE :<br>2014-02-23 | MOLD NO.          |        |
|                                                                                                                                |                    |                      | DRAW NO:          |        |
|                                                                                                                                |                    |                      | SHEET NO.         | 1 OF 1 |