
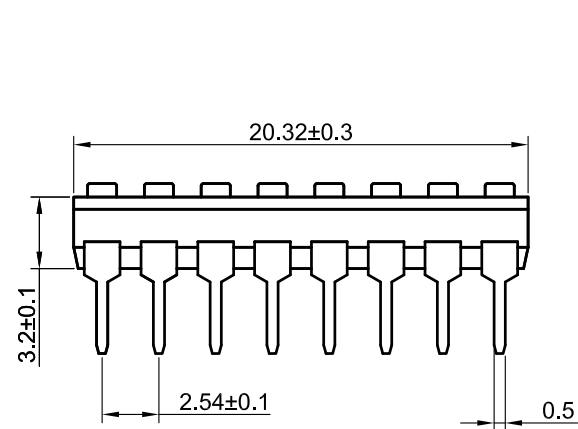
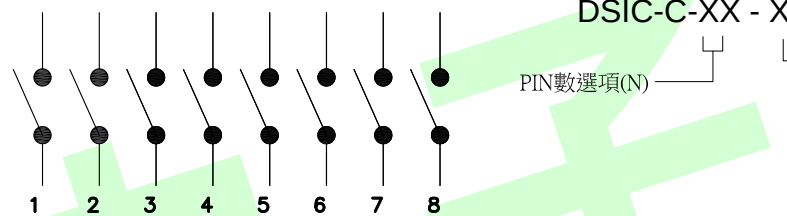
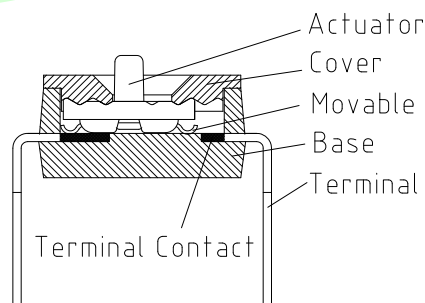
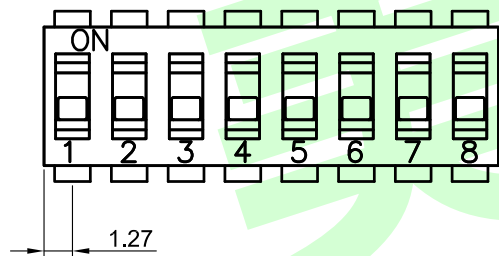


平推柄 Hhort handle



DSIC-C-XX - X  
PIN數選項(N)  
Packing :  
R: Reel  
T: Tube

| Poles(N) | A (mm) |
|----------|--------|
| 01       | 2.54   |
| 02       | 5.08   |
| 03       | 7.62   |
| 04       | 10.16  |
| 05       | 12.70  |
| 06       | 15.24  |
| 07       | 17.78  |
| 08       | 20.32  |
| 09       | 22.86  |
| 10       | 25.40  |
| 12       | 30.48  |

规格：

电气寿命：  
无切换：100mA@50VDC  
切换：25mA@24VDC  
绝缘电阻：100MΩ@250VDC  
接触电阻：50MΩ max  
操作力度：500gf max  
使用温度：-30℃ to 85℃ (no ice)

材料：

开关盖：PPS UL 94-V0  
开关体：PPS UL 94-V0  
操作杆：PA46 UL 94-V0  
弹片：镀金铍铜  
端子：镀金黄铜

|        |        |          |                         |            |                 |          |    |             |    |      |           |                                                                                       |
|--------|--------|----------|-------------------------|------------|-----------------|----------|----|-------------|----|------|-----------|---------------------------------------------------------------------------------------|
|        |        |          | angle                   | ±2°        |                 | design   |    | date        |    | name | DSIC-C-08 |                                                                                       |
|        |        |          | 10~30                   | ±0.30      |                 | Review   |    | date        |    |      |           |                                                                                       |
|        |        |          | 5~10                    | ±0.20      |                 | Approved |    | date        |    | name |           |                                                                                       |
|        |        |          | ~ 5                     | ±0.10      | Drawing number: |          |    |             |    |      |           |                                                                                       |
| modify | Review | Approved | Tolerance not specified | Proportion | 1:1             | unit     | mm | gape number | A4 |      |           |  |