
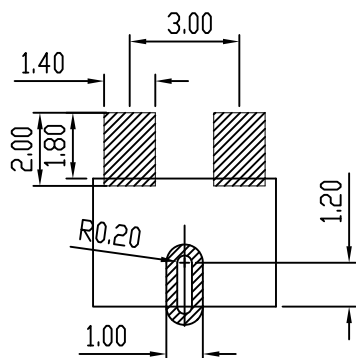


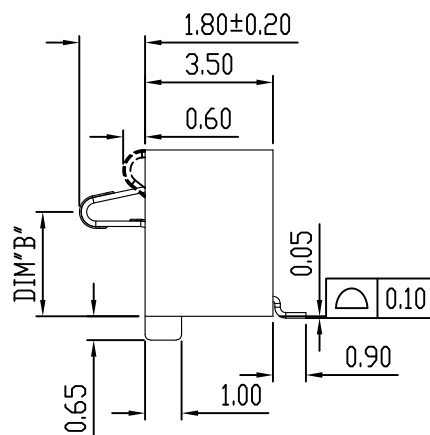




RECOMMENDED PCB LAYOUT
TOL: (±0.05)

规格型号	DIM A	DIM B
HYC-BB2P3072-C	7.2	5.5
HYC-BB2P3065-C	6.5	4.8
HYC-BB2P3050-C	5.0	3.3
HYC-BB2P3046-C	4.6	2.9

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃ ~ +85℃

塑件 (材质): LCP 黑色

接触点 (材质): 铜合金



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5'		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 3.0PH 2P 侧压电池座	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	SEE TABLE
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-2608291645
				SHEET NO.	1 OF 1